


4.Installation

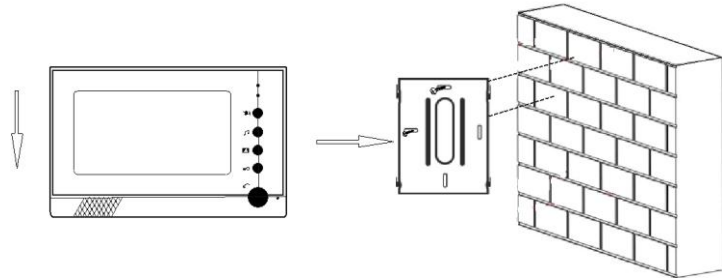


5.Specification Instruction

Display Screen	7inch color TFT-LCD digital display screen
Resolution	800*480
Dimension	230*150*27mm
Power Supply	DC15V 1500mA
Adapter input voltage	1VP-P/75Ω
Music	36 music to adjust
Monitor Timing	60 seconds
Intercom Timing	60 seconds
Power	Standby:≤1W Working:≤10W
Working Temperature	-20°C--+60°C
Memory	Support at most 32G SD Card
Wiring	4-core RVV4*0.5mm




Video Door Phone with photo shooting

User instruction

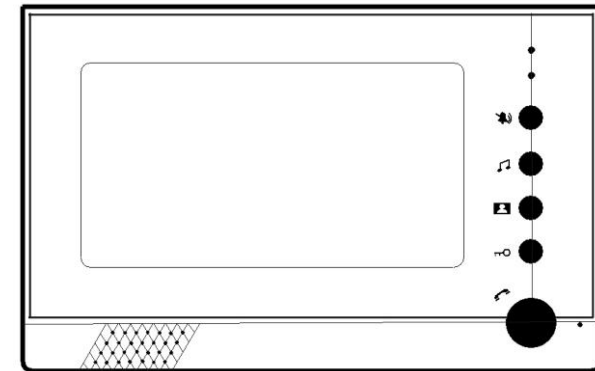


Please read all of these instruction before installation

1.Button Instruction

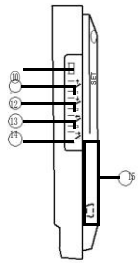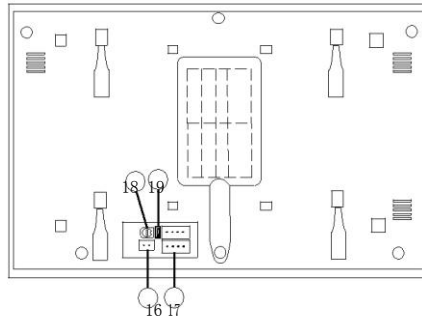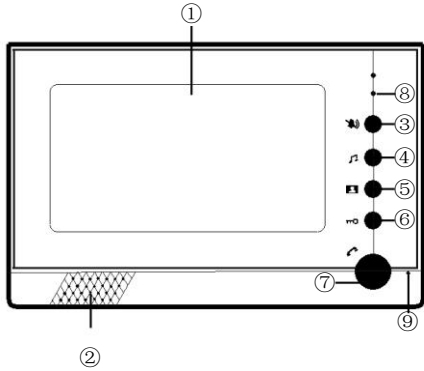

- ①. TFT-LCD
- ②. Speaker
- ③. Ring cancel
- ④. Ring volume regulator& Ring music regulator
- ⑤. Monitor
- ⑥. Ulock
- ⑦. Intercom button(Hand Free)
- ⑧. Power LED
- ⑨. Mic
- ⑩. 1 Open/Close Shooting photos or Record video
- 11. 2 Null (project testing)
- ⑫. 3 Upward
- ⑬. 4 Downward
- ⑭. 5 Entry or Exit Setting
- ⑮. Micro SD card slot
- ⑯. Power supply connector
- ⑰. Outdoor camera connector
- ⑱. Intercom volume adjustment
- ⑲. Ring back connector

2.Menu Instruction

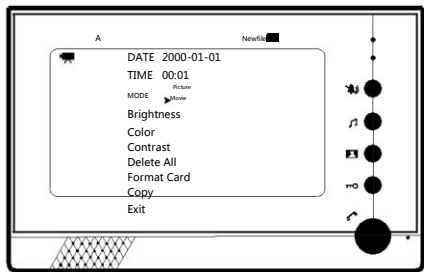

- / Record Mode / photo shooting
- A/CAP/REC** Automatically take photos & record video/taking photos/ recording video
- Newfile** Newfile
- Memory card insert

3.User Instruction

a.Setup Interface

Pressing the monitor enter into working state, Press the “5” side button to the menus, press the “3” and “4” side button “UP”/ “DOWN” to choose the menu. Then you can set up the Date, time, shooting mode,color,brightness, contrast and so on. After all, press the “5” side button(about 3seconds) to SAVE and EXIT.

b.Select the Mode

1.Photos shooting Mode

Pressing the monitor enter into working state, Press the “5” side button to the menus, Select the “MODE Picture”,press the “5” side button (about 3seconds) to save and exit. Then the indoor monitor will automatically take photos. Then No matter when you press the call button or the monitor is on the working state, it will save one picture in the monitor. You can press “1”side button to setup “Open”or “Close” the function of manual taking. Additionally, users also can press “4” downward button into manual takingphotos , when press ,then take one picture.

2.Check Photos

Pressing the monitor enter into working state,press “4” side button, then you can press “3” and “4” up or down to check the pictures in the monitor. The indoor monitor can take and store 100pcs photo Cycle Replace. The shooting photos only can be stored in the monitor .

(If you only want to take photos ,don’t need add the SD card)

3.Record Mode

Pressing the monitor enter into working state, Press the “5” side button to the menus, Select the “MODE Movie”,press the “5” side button (about 3seconds) to save and exit. Then the indoor monitor will record video . Then No matter when you press the “call” button or the monitor is on the working state, it will record one video on the SD card. You can press “1”side button to setup “Open”or “Close” the function of recording video. Press “4” to hang up.

(All the video will save in the SD card, if have no SD card ,can not use record function. We can support at most 32G SD Card)

4.Check the video

Pressing the monitor enter into working state,press “4” side button to hang up the recording, then you can press “3” and “4” up or down to check the recording video. Press “5” side button (in short time) can stop the video, press “1” side button can setup the video play fast or slow. Press “5” side button(About 3 seconds) to exit, support playing on the player software.

(Mark: The SD card insert side: the chip side is on the front, the same as the screen)