




No.	Part Name	No.	Part Name	No.	Part Name	No.	Part Name
1	Channel Selector Knob	8	LED Indicator	15	On-Off Key	22	Accessory Connector
2	Push-to-Talk (PTT) Key	9	Speaker	16	Down Key	23	USB Type-C Port
3	Volume UP Key	10	Microphone	17	Contact Key	24	Strap Hole
4	Volume Down Key	11	LCD Display	18	P1 Key*	25	Belt Clip
5	Side Key 3 (SK3)* • BP56X/AP58X: Top Key (TK)* • BP51X/AP51X: On-Off Key	12	OK/Menu Key	19	P2 Key*	26	Battery
6	Antenna	13	Up Key	20	P3 Key*	27	Charging Contacts
7		14	Back Key	21	Keypad	/	/

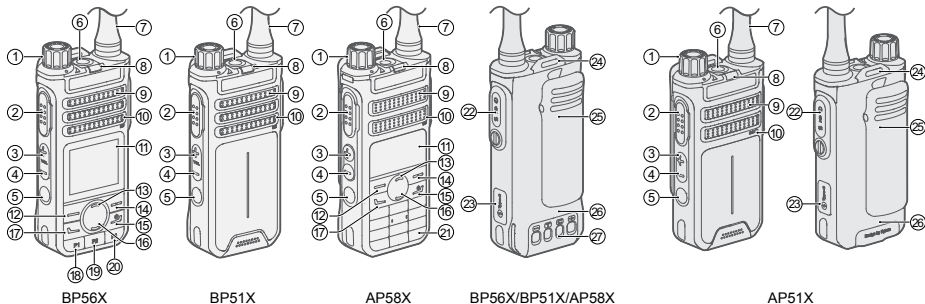

NOTE

- For details about the programmable keys (*), contact your dealer.
- Figures in this guide are only for reference.

Basic Operations

Charging the Battery



CAUTION

- Read the Safety Information Booklet before charging.
 - Use the approved charger to charge the battery.
 - The remaining lithium-ion battery power is limited to 30% pursuant to the new lithium battery shipment regulation approved by the International Air Transport Association (IATA).
- Use the charger to charge the battery alone or the battery attached to the radio. This method applies only to BP56X, BP51X, and AP58X. The LED indicator on the charger shows the charging status. For details, check the label on the bottom of the charger.
 - Use the USB Type-C cable to connect the radio with battery attached to the power adapter, power bank, or PC. The LED indicator on the radio shows the charging status, as described in the following table.

Status	Description
Glows red	The battery is being charged.
Flashes red rapidly	The battery fails to be charged.
Glows green	The battery is fully charged.

Turning On or Off the Radio

Long press the **On-Off** key.

Adjusting the Volume

Press the **Volume UP** key to increase the volume, or **Volume Down** key to decrease the volume.

Selecting a Zone

- Press the preprogrammed **Zone Up** or **Zone Down** key.
- Go to **Menu > Zone** to select a zone. This method applies only to BP56X and AP58X.

Selecting a Channel

Rotate the **Channel Selector** knob.

Call Services

To keep the audio quality, keep your mouth 2.5 centimeters to 5 centimeters away from the microphone.

Initiating a Call on Digital Channel



NOTE

This feature is available only for BP56X and BP51X.

- Rotate the **Channel Selector** knob to select the digital channel, and then press and hold the **PTT** key.
- Go to **Menu > Contacts/CallLogs** to select a contact, and then press and hold the **PTT** key. This method applies only to BP56X.

Initiating a Call Without Signaling on Analog Channel

1. Rotate the **Channel Selector** knob to select the analog channel.
2. Press and hold the **PTT** key.

Status Indications

LED Indicator

Status	Description
Flashes green	The radio is being turned on.
Glows red	The radio is transmitting.

Status	Description
Glows green	The radio is receiving.
Flashes red slowly once every 1 minute	The battery power is low.
Flashes orange slowly	The radio is scanning.
Glows orange	The call is on hold.
Glows green for 2 seconds (Available only for BP51X and AP51X.)	The battery power is high.
Glows orange for 2 seconds (Available only for BP51X and AP51X.)	
Glows red for 2 seconds (Available only for BP51X and AP51X.)	
	The battery power is medium.
	The battery power is low.

LCD Icons

This feature is available only for BP56X and AP58X.

Icon	Description
	More bars indicate more remaining battery power.
	The battery power runs out. Recharge or replace the battery.

Icon	Description
	The radio detects no signal.
	The number of bars indicates the signal strength.
	In analog mode, the radio transmits when the PTT key is pressed.
	The radio operates in low power mode.
	The radio operates in high power mode.
	The radio is scanning.
DM	Direct Mode: The radio transmits and receives directly.
RM	Repeater Mode: The radio transmits and receives through a repeater.
	The VOX feature is enabled.
	The speaker is turned on.
	The radio operates in silent mode.
	An accessory is connected.

For details on more features and operations, please visit our website at: <https://www.hytera.com/en/download-center.html>, or scan the QR code to download the relevant user manual.



BP56X



BP51X



AP58X



AP51X



is the trademark or registered trademark of Hytera Communications Corporation Limited.

© 2021 Hytera Communications Corporation Limited. All Rights Reserved.

Address: Hytera Tower, Hi-Tech Industrial Park North, 9108# Beihuan Road, Nanshan District, Shenzhen, People's Republic of China

Postcode: 518057

[https:// www.hytera.com](https://www.hytera.com)

