BALDOR • RELIANCE

Customer information packet
EWDM3546T

1HP, 1500RPM, 3PH, 50HZ, 143T, 3522M, TENV, F1
Ferreteria Amunategui S.A.
Class - None
Divisio - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/8/2024 9:30:50 AM

Specifications

Enclosure	TENV
Frame	143T
Frame Material	Steel
Frequency	50.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	1.000 HP @ 50 HZ
Phase	3
Synchronous Speed @ Frequency	1500 RPM @ 50 HZ
Voltage @ Frequency	230.0 V @ 50 HZ 400.0 V @ 50 HZ
Agency Approvals	CSA EEV NEMA PREMIUM NEMA_PREMIUM UR
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	4.40 A @ 230.0 V 1.90 A @ 400.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	82.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None

Part detail

Revision	C
Type	AC
Mech. spec.	35SS584
Base	
Status	PRD/A
Elec. spec.	35WGZ818
Layout	35LYSS584
Eff. date	02-14-2024
CD Diagram	CD0005
Poles	04
Leads	9#18 Y
Proprietary	False
Created date	10-01-2021

Heater Indicator	No Heater
High Voltage Full Load Amps	1.7 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	M
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Quantity/Wire Size	9 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3522M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	12.12 IN
Power Factor	66
Product Family	Wash Down
Pulley End Bearing Type	Sealed Bearing
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	0.875 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1770 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1669L											
CAT.NO.	EWDM3546T										
SPEC.	35SS584Z818G1										
HP	1										
VOLTS	230/400										
AMP	4.8/1.90										
RPM	1465										
FRAME	143T		**HZ**	50			**PH**	3			
SER.F.	1.0	**CODE**	M	**DES**	B	**CLASS**	F				
NEMA-NOM-EFF	82.5	**PF**	68								
RATING	40C AMB-CONT										
CC	010A										
DE	6205		**ODE**	6203							
ENCL	TENV	**SN**									
BLANK	20:1CT, 20:1VT										

Parts list

Part number	Description	Quantity
SA398808	SA 35SS584Z818G1	1.000 ea
RA389829	RA 35SS584Z818G1	1.000 ea
NS2512A01	INSULATOR, CONDUIT BOX X	1.000 ea
35CB3010A01G	35 CB .75 NPT @ 6:00 (GRAY)	1.000 ea
35GS1040	35 MOLDED GASKET W/LIP, LEAD SEAL,	1.000 ea
51XB1016A08	10-16X 1/2HXWSSLD SERTYB	2.000 ea
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 ea
35EP3122D00W	MASTER ODE,203 BRG,.125NPT DRNS(WHITE)	1.000 ea
HW4072A01	BLACK DRAIN PLUG FOR .125 NPT	3.000 ea
HW5100A03	WAVY WASHER (W1543-017)	1.000 ea
35EP3123E00W	MASTER DE,205 BRG,1.623SH,.125NPT DRNS(W	1.000 ea
HW4072A01	BLACK DRAIN PLUG FOR .125 NPT	3.000 ea
HW4600B49	SEAL 0.938 X 1.624 X 0.250 SINGLE LIP DB	1.000 ea
XY1032S02	10-32 HEX NUT R.H. S STL	4.000 ea
35CB4522	35 LIPPED CB LID PRIMED	1.000 ea
35GS1030A02	35 GS FOR CB LID - WHITE NEOPRENE	1.000 ea
59XW0832S07	TAPTITE II,HEX WSHR UNSLTD SER,410 S.S.,	4.000 ea
HW4600B46	V-RING SLINGER 0.875 X 1.420 X .24 VITON	1.000 ea
HW2502D13	SS KEY, 3/16 SQ X 1.375	1.000 ea
HA7000A01	KEY RETAINER 7/8" DIA SHAFT	1.000 ea
MJ5001A27	32220KN GRAY SEALER *MIN BUY 4 QTS=1GAL	0.001 qt
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
LB1164	LABEL,WARNING AND DRAIN	1.000 ea
HA5027A02	HA4054 T-DRAIN X2 BAGGED WITH LABEL	1.000 ea
MJ1000A02	GREASE, POLYREX EM EXXON	0.050 lb
MG1025Z02	ACTIVATOR WILKOFAST 060.02HF	0.010 ga
MG1025W01	WILKOFAST, 781.01, SIGNAL WHITE #9003	0.017 ga
HA3100S09	THRUBOLT 9.25 LENGTH SS	4.000 ea
LC0005	CONN.DIA.,TY M,9-LD,DUAL VOLT,REVERSING	1.000 ea
NP1669L	SS WD SUPER-E UL PREM REV MTG	1.000 ea
35PA1066	PKG GRP, PRINT PK1008A06	1.000 ea

PK3082	STYROFOAM CRADLE	1.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500bx)4/22	1.000 ea
FE-0000001	ZRTG FE ASSEMBLY	1.000 ea
PE-0000002	ZRTG PE ASSEMBLY	1.000 ea

AC Induction Motor Performance Data
Record # 89784
Typical performance - not guaranteed values

Winding: 35WGZ818-R002	**Type:** 3522M	**Enclosure:** TENV

Nameplate Data			**400 V, 50 Hz: High Voltage Connection**	
Rated Output (HP)		1	**Full Load Torque**	2.99 LB-FT
Volts		230/400	**Start Configuration**	direct on line
Full Load Amps		4.8/1.90	**Breakdown Torque**	16.6 LB-FT
R.P.M.		1450	**Pull-up Torque**	7.42 LB-FT
Hz	50 **Phase**	3	**Locked-rotor Torque**	10.32 LB-FT
NEMA Design Code	B **KVA Code**	M	**Starting Current**	16.1 A
Service Factor (S.F.)		1.0	**No-load Current**	1.23 A
NEMA Nom. Eff.	85.5 **Power Factor**	66	**Line-line Res. @ 25ºC**	14.4 Ω
Rating - Duty		40C AMB-CONT	**Temp. Rise @ Rated Load**	63°C
S.F. Amps			**Temp. Rise @ S.F. Load**	71°C
			Locked-rotor Power Factor	60.4724
			Rotor inertia	0.159 lb-ft²

Load Characteristics 460 V, 60 Hz, 1 HP

% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**	**S.F.**
Power Factor	27	43	56	66	73	78	72
Efficiency	70.8	81.2	84.5	85.9	85.8	85.2	85.5
Speed	1793	1786	1781	1773	1766	1758	1768
Line amperes	1.25	1.34	1.49	1.67	1.87	2.12	1.75


ABB Motors and Mechanical Inc.


WINDING # 35WGZ818

1 HP 3 PH 60 HZ 1770 RPM 460 V 3522M


Typical performance - not guaranteed values.


TORQUES(LB-FT): PO=16.6 PU=7.42 LR=10.32 LRA=16.1

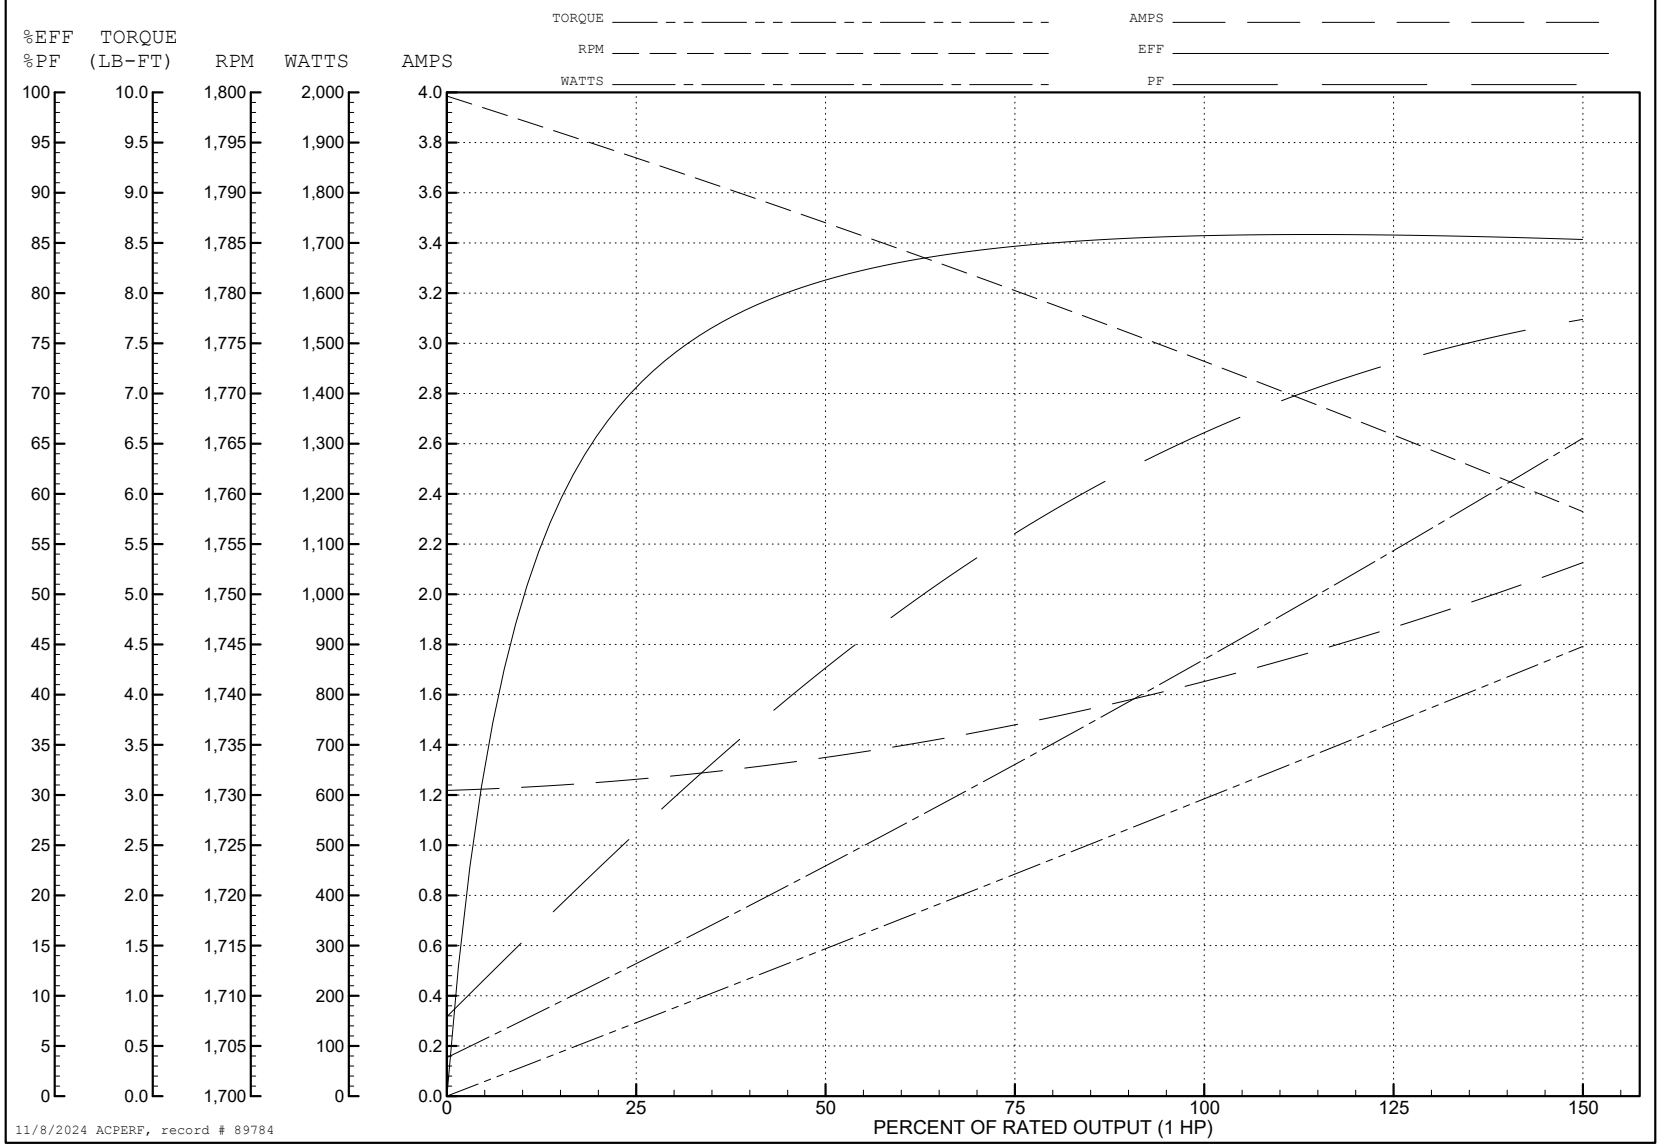

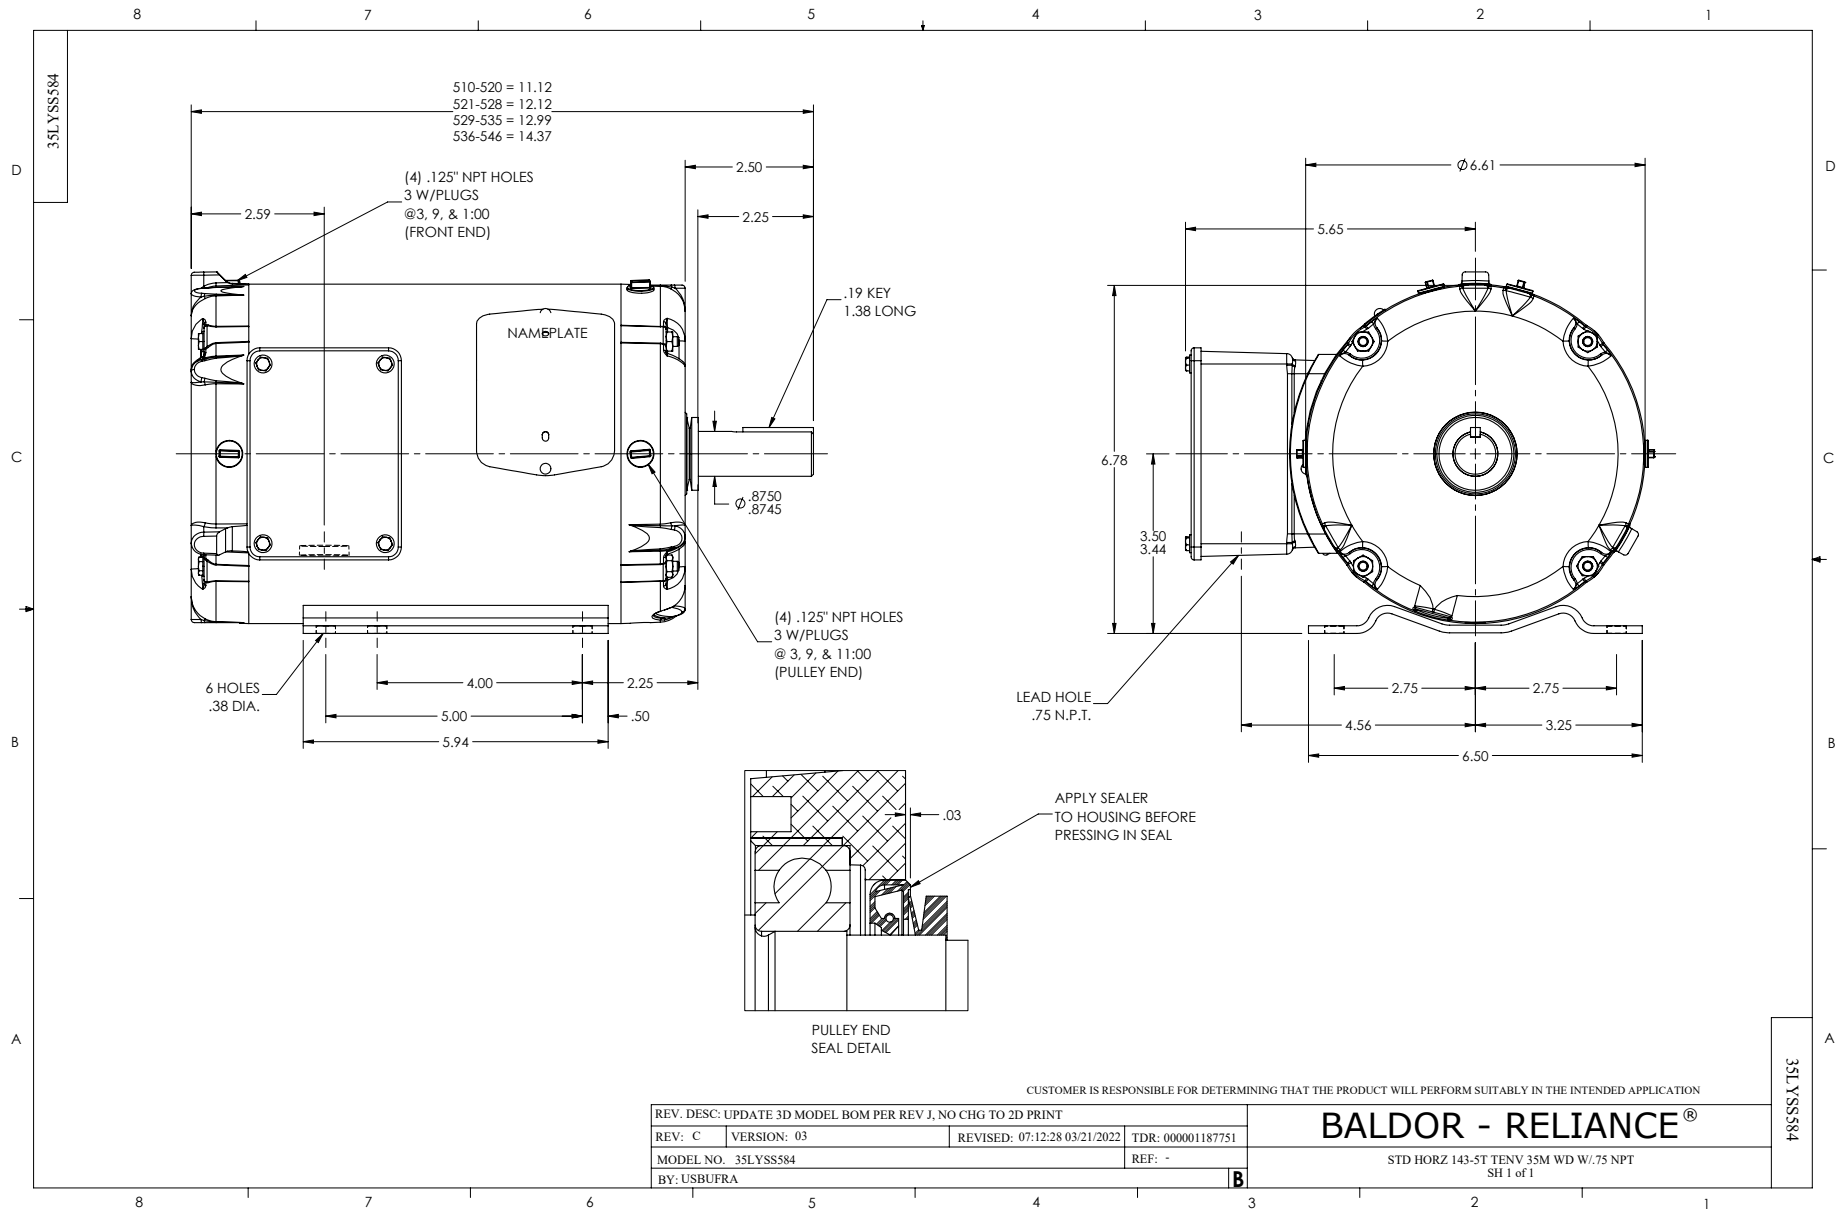
35LYSS584
510-520 = 11.12
521-528 = 12.12
529-535 = 12.99
536-546 = 14.37
(4) .125" NPT HOLES
3 W/PLUGS
@3, 9, & 1:00
(FRONT END)
2.59
2.50
2.25
.19 KEY
1.38 LONG
NAMEPLATE
Ø.8750
Ø.8745
(4) .125" NPT HOLES
3 W/PLUGS
@ 3, 9, & 11:00
(PULLEY END)
6 HOLES
.38 DIA.
4.00
2.25
5.00
.50
5.94
Ø6.61
5.65
6.78
3.50
3.44
LEAD HOLE
.75 N.P.T.
2.75
2.75
4.56
3.25
6.50
.03
APPLY SEALER
TO HOUSING BEFORE
PRESSING IN SEAL
PULLEY END
SEAL DETAIL
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION
REV. DESC: UPDATE 3D MODEL BOM PER REV J, NO CHG TO 2D PRINT
REV: C
VERSION: 03
REVISED: 07:12:28 03/21/2022
TDR: 000001187751
MODEL NO. 35LYSS584
REF: -
BY: USBUFRA
B
BALDOR - RELIANCE®
STD HORZ 143-5T TENV 35M WD W/.75 NPT
SH 1 of 1
35LYSS584

CD0005

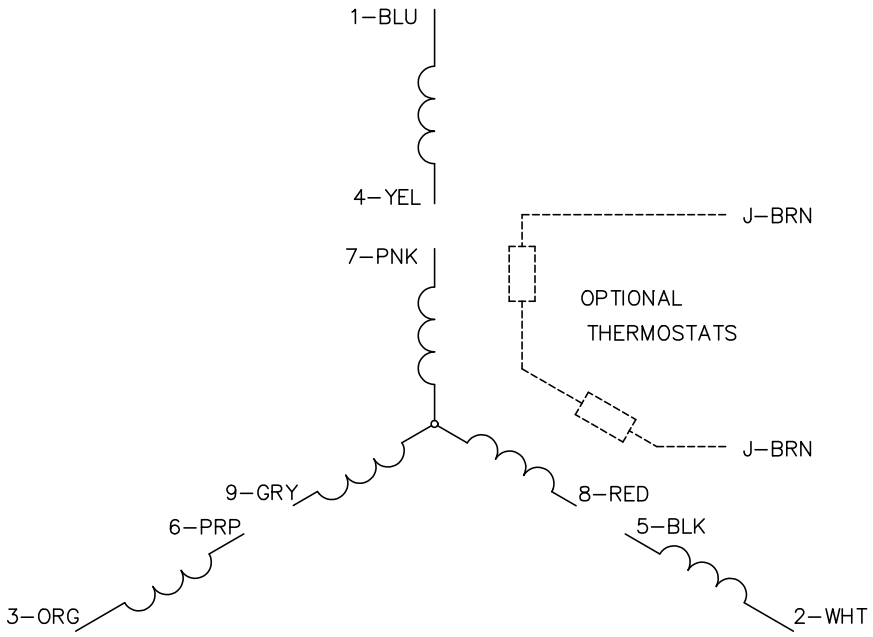

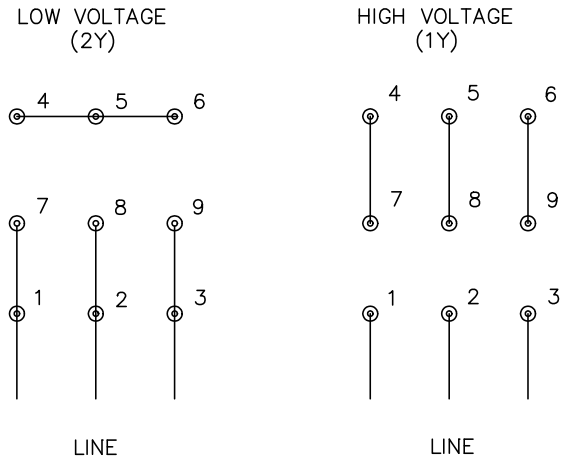

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			BALDOR ELECTRIC Co.
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
CD0005		FILE: AAA00005140	MDL: –
		MTL: –	3PH, DV, 9 LEADS