LUBEGARD®

www.lubegard.com

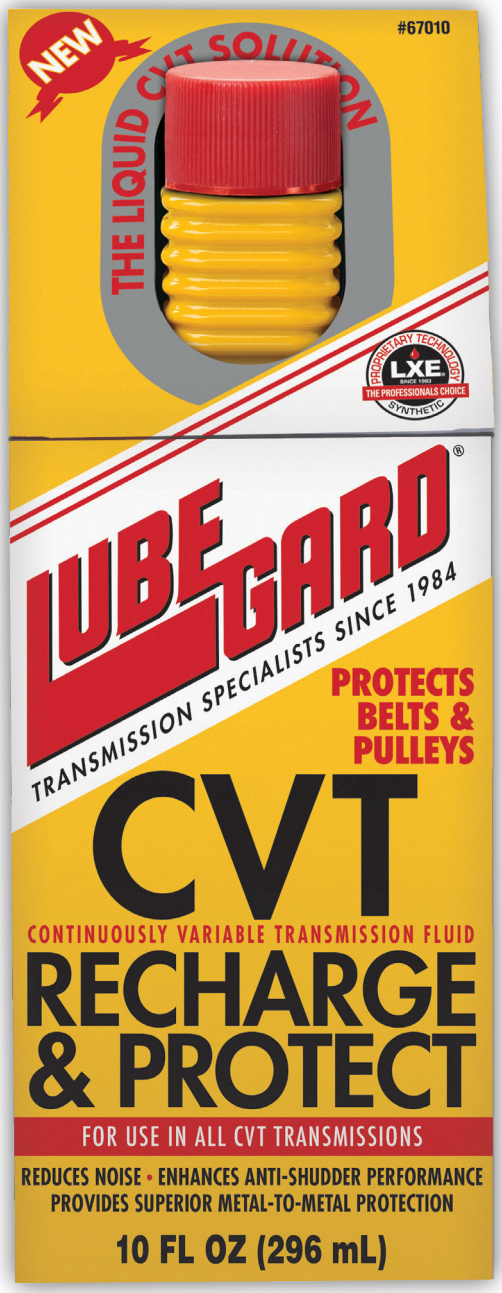

CVT Recharge & Protect™

FOR USE IN ALL CVT TRANSMISSIONS

Lubegard, the #1 choice of transmission rebuilders, introduces LUBEGARD CVT RECHARGE & PROTECT, specifically formulated for continuously variable transmissions. Our CVT RECHARGE & PROTECT revitalizes the worn-out fluid by restoring additive components essential to optimal performance of CVTs. It reduces noise and enhances anti-shudder performance for smoother operation. Formulated with proprietary LXE® (Liquid Wax Esters) Technology, it protects internal parts from excessive wear and reduces fluid degradation by raising the thermal and oxidative stability of the fluid. Established in 1984, Lubegard's products have won more professional transmission rebuilding industry awards than any other brand to date.

REDUCES NOISE • ENHANCES ANTI-SHUDDER PERFORMANCE
PROVIDES SUPERIOR METAL-TO-METAL PROTECTION

- For use in all CVTs
- Corrects and prevents problems caused by worn-out, degraded fluid
- Reduces noise
- Protects belt/chain, pulleys and other components from excessive wear
- Provides anti-shudder durability
- Maintains belt traction
- Reduces foaming to maintain proper fluid pressure and flow
- Lubricates and protects seals without shrinking or swelling them
- Increases heat stability of the fluid

AVAILABILITY

Stock No.	Unit Size	Case Qnty
67010	10 oz.	12/c
67105	5 gal.	n/a
67155	55 gal.	n/a
67133	330 gal.	n/a

INTERNATIONAL LUBRICANTS, INC.
7930 Occidental South • Seattle, WA 98108 • 206-762-5343 • 800-333-LUBE (5823)

LUBEGARD®

www.lubegard.com

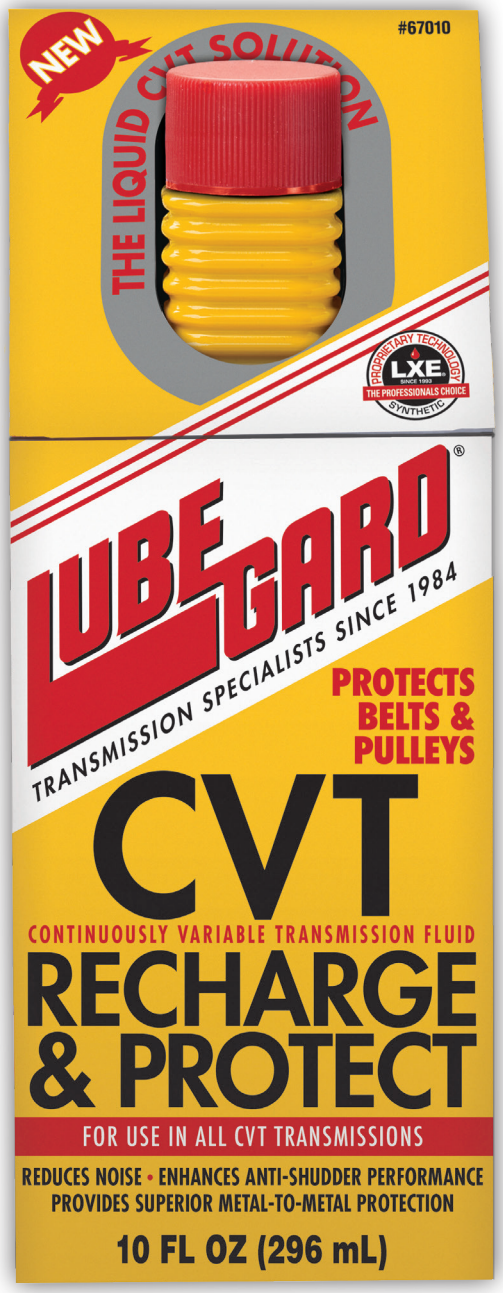

FIGURE 1

LUBEGARD CVT RECHARGE & PROTECT* DRAMATICALLY IMPROVES WEAR PERFORMANCE

(ASTM D4172 FOUR BALL WEAR TEST)

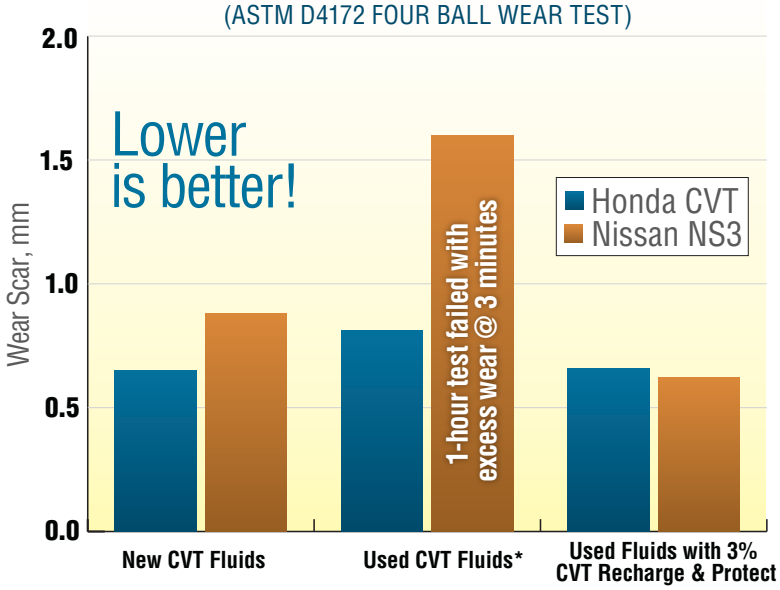

*Nissan NS3 Used Fluid had 224,069 miles on the original factory-fill fluid extracted from 2014 NV200. Honda HCF-2 Used Fluid had 27,322 miles on the original factory-fill fluid extracted from 2013 Honda Accord

LACK OF LUBRICATION AND WORN OUT FLUID LEADS TO:
Objectionable noise
Shudder due to worn out friction components
Belt slippage
Improper pressure & flow of CVT fluid due to foaming
Excessive component wear
Heat that results in sludge

DIRECTIONS FOR USE:

One, 10 oz (296 mL) bottle of LUBEGARD CVT Recharge & Protect is designed to treat CVT transmissions between 6-10 quarts. Shake well before use. Using a funnel, add one ounce of LUBEGARD per quart for the total capacity of the transmission. Do not exceed 2 ounces per quart. Do not overfill. *Allow up to 150 miles to show full results.

For best results, we recommend fluid and filter change when adding Lubegard CVT Recharge & Protect. Filter change will help with hesitations and responsiveness of the transmissions.

INTERNATIONAL LUBRICANTS, INC.
7930 Occidental South • Seattle, WA 98108 • 206-762-5343 • 800-333-LUBE (5823)