



FIXED MANUAL MONITOR

3030

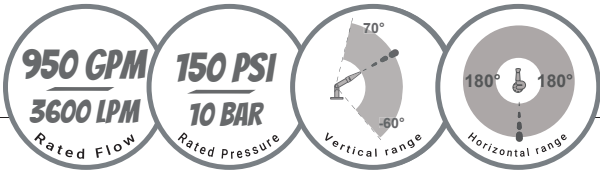

- Compact, high performing, cost-effective.
- Easy to use and quickly responded with tiller bar.
- Flow rates up to 950 GPM(3600 LPM).

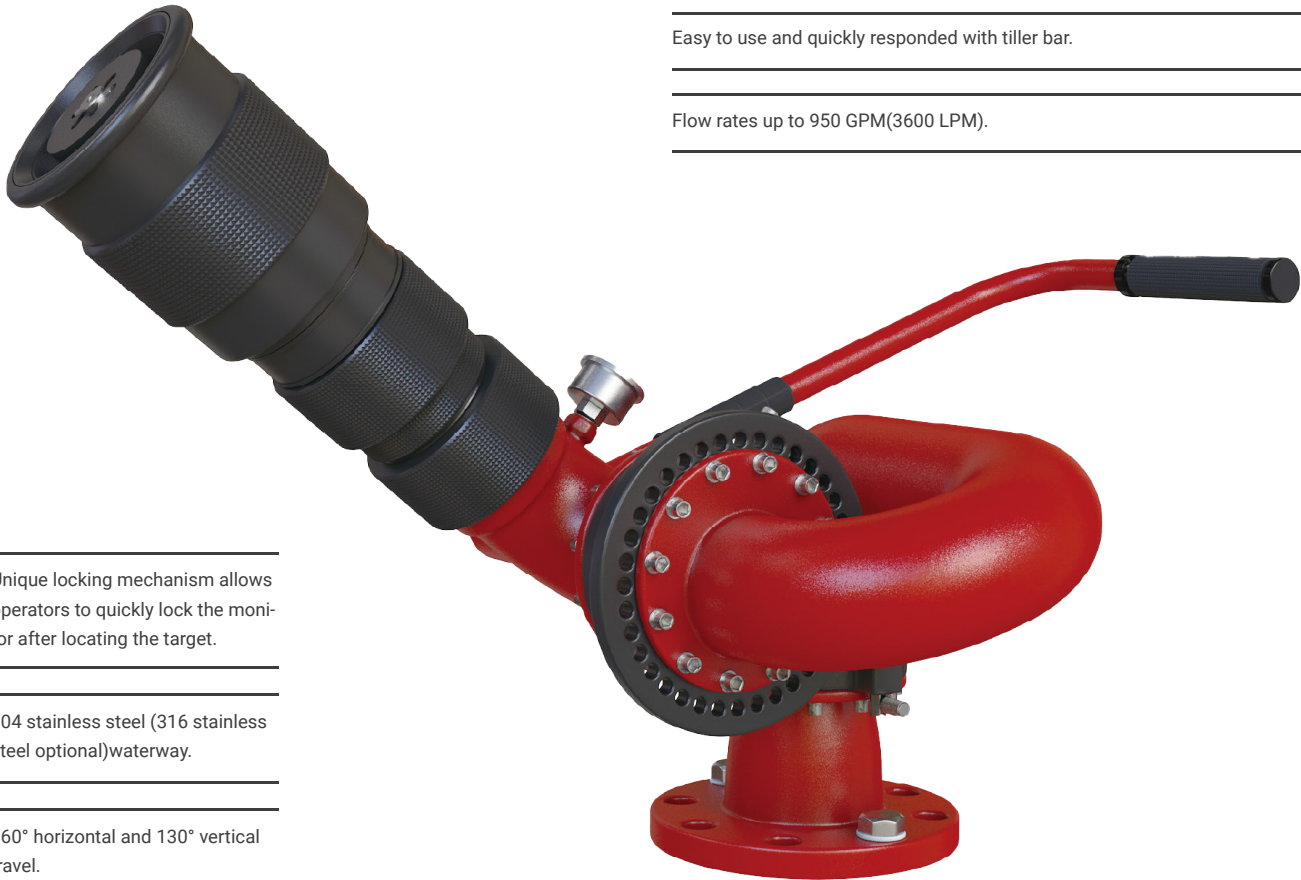

- Unique locking mechanism allows operators to quickly lock the monitor after locating the target.
- 304 stainless steel (316 stainless steel optional)waterway.
- 360° horizontal and 130° vertical travel.

Style 3030 Manual monitor provides a simple tiller bar control with compact design for maximum control and rapid positioning with an range of horizontal angle 360 degrees and vertical angle 130 degrees. It is specially designed for fixed use on fire truck, docks, and various harsh environment.

Model	Weight lbs.(kg)	Inlet	Outlet	Max.Flow		Pressure		Material	Travel		Control
				GPM	LPM	Working (Pr)	Maximum (Pn)		Horizontal	Vertical	
3030	37 (17kg)	3" or 4" Flange (75 or 100mm)	2 1/2 " Male (65mm)	950	3600	150 psi (10 bar)	232 psi (16 bar)	Nozzle: Aluminum Alloy Waterway: SS304	0°~360°	-60°~+70°	Manual



Pressure gauge



Positioning device



Operating tiller bar with anti-slip sleeve