





Rain cover
Apply a circle of structural adhesive before in stallation

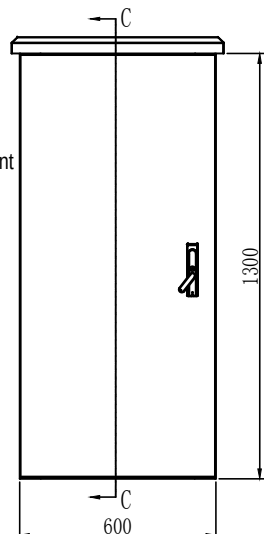

MS840 Three point lock

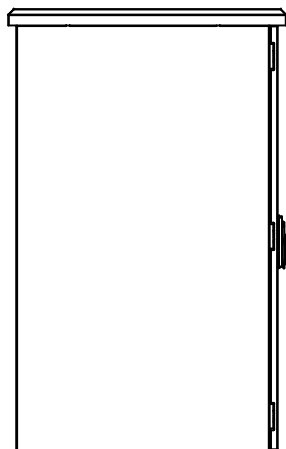


8-φ50 Protective coil




27U Square hole strip*4

2-position fan unit

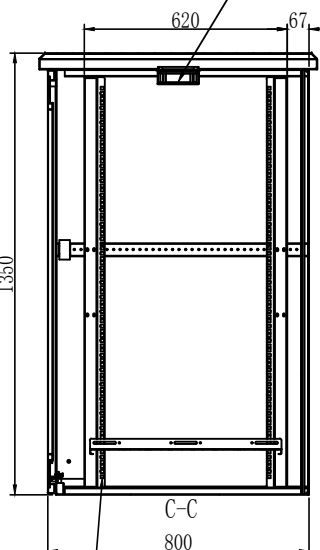


Install the card rail and temperature control switch

CL201 Hinge *3
Apply structural adhesive first and then screws

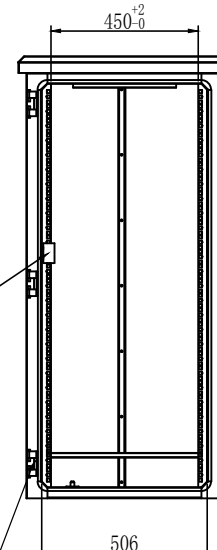

Make a circle of foam adhesive on the inside of the door panel

Apply a circle of structural adhesive on the inner side of the upper part of the frame

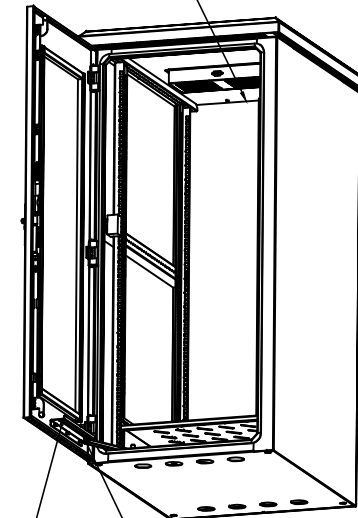

Install windproof pole components

Technical requirements

- 1.Cabinet specifications (WxDxH) 650mm×850mm×1350mm(With rain cover)
- 2.The overall frame is formed by bending and welding 2.0mm thick cold plates to meet the IP54 protection level requirements
- 3.The front door adopts MS840 Three point flat handle lock (with pull rod and roller), Install windproof pole components and one 1.5 square 0.3 meter grounding wire below ;
- 4.The frame and front door are connected by die-casting hinges, and the contact surface between the door panel and the front end of the frame is processed with a circle of foam adhesive, with 4 44U spray painted square hole strips installed inside ;
- 5.Install 8 φ 50 protective coils on the bottom plate of the cabinet, 2 fan units on the top of the cabinet, and 1 585 deep fixed layer board (3U) inside
- 6.The overall cabinet is sprayed with RAL7035 outdoor orange stripe powder to meet the anti rust and anti-corrosion performance requirements of the cabinet ;
- 7.The cabinet is shipped using laminated wood pallets, stretch film, and blank header cardboard boxes.

					产品型号	户外柜	镀涂	
		更改单号	签名	日期	Product Model		材料	
		Modify the number	Drawer	Date			视图关系	数量
					零件名称	6627户外柜	Perspective	Quantity
核对/Recheck			日期/Date		Part Name		比例	版本
							Scale	Edition
					零件图号			
批准/Approv			日期/Date		Part No			