SC/UPC-SC/APC

Fiber Fast Connector

Thank you for purchasing and using the product.For using the product properly,please read this operational instuction carefully before installment and usage.

1.SC/PC uses the blue shell ,SC/APC shell using the Green Party
2.This product is suitable for 3.0*3.0mmcable.
3.Please ensure that the construction environment should be wuthin the allowable range.
4.Failure to follow "Operational Instuction"all the problems caused by users will be at your own risk.
5.All the tools involved in this Operational Instuction should be configured by users themselves.
6.The average insertion loss values is smaller or equal to 0.25db(typical 0.2db),the average return loss value is more than or equal to 45db.

Product content




Connector 55MMX8.9MMX7MM





SC casing

Tool using

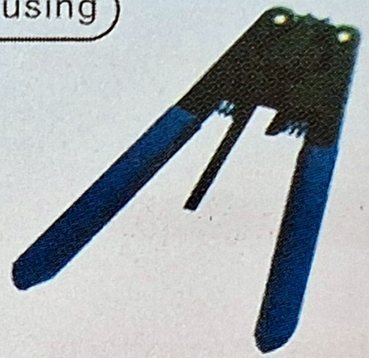

tool of cable stripping




Miller clamp




guide rail

Prefabricated fiber

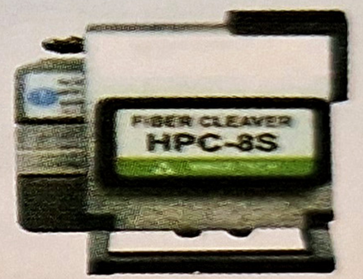

Fiber cleaver

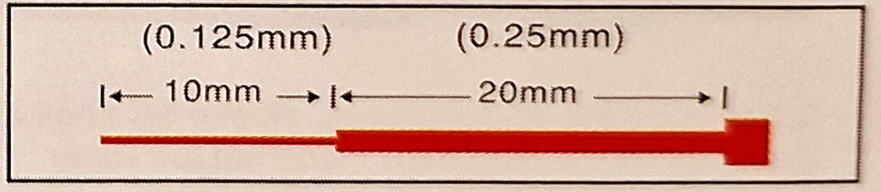


Operation steps


Note: in the following steps, you must ensure the cleanness of the product and fiber.



1.Prefabricated fiber to penetrate.The products, hand pinchflex and tail,the fiber lines of the micro bending,bending height is about 2mm.

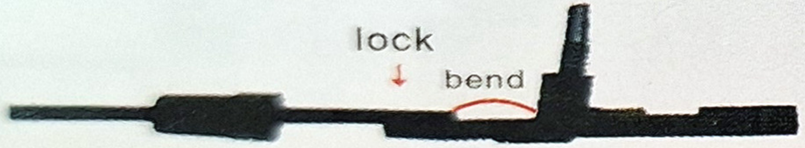

2.The push push to the top lines, closed end cap, handsclenched tail cover.

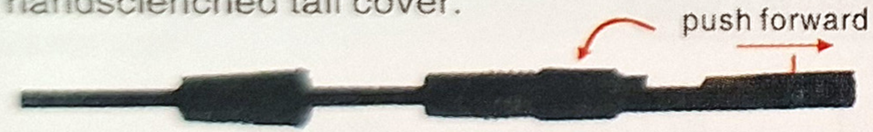

3.Screw on the screw sleeve, sleeve SC shell,assembled (use pull off the dust cap).clenched tail cover.



1.Put on the dust cap, remove SC square case.
2.Push the hand slap to the bottom of the antenna unit circle.
3.Unscrew the threaded sleeve and gently pull out the cable to finish the restart.

Product Features

Fast connector is a kind of connector which can solve the openration of field wiring.and FTTH engineering. Glue,electric tools and grinding tools are needless when assembling.It is widely applied in construction site where need fast connect.It is a fast and stable connector for operation.



Don't look at the surface of fiber when laser signal is transmitting