




MEDUSA


Type of manufacture (carpet tile) Art der Herstellung (Teppichfliese) Methode de fabrication (dalle de moquette)	ISO 2424		1 / 10 Loop Pile (tufted)
Dimensions Abmessungen Dimensions	EN ISO 24342	cm	50cm x 50cm 20 tiles/box = 5m ² - 24 boxes/pallet = 120m ²
Primary backing Trägermaterial Premier dossier	ISO 2424		Polyester non-woven
Secondary backing Rückenausrüstung Envers sous-couche	ISO 2424		Bitumen
Pile fibre composition Faserzusammensetzung der Nutzschicht Composition du velours	ISO 2424		iMax® 100% Solution Dyed Nylon (SDN)
Total thickness Gesamtdicke Epaisseur totale	ISO 1765	mm	5,4
Effective pile thickness Polschichtdicke Epaisseur du velours	ISO 1766	mm	2,4
Total mass Gesamtgewicht Masse surfacique totale	ISO 8543	g/m ²	4.000
Total pile mass Poleinsatzgewicht Masse surfacique de velours totale	ISO 2424	g/m ²	505
Effective pile mass Polschichtgewicht Masse surfacique de velours utile	ISO 8543	g/m ²	280
Pile density Pol-Rohdichte Densité du velours	ISO 8543	g/cm ³	0,117
Number of tufts Noppenzahl Nombre de touffes	ISO 1763	/dm ²	1.970
Static electrical propensity Begehtest Test du marcheur	ISO 6356	kV	≤2
Use classification Beanspruchungsbereich Classement d'usage	EN 1307		33 Contract use - Heavy 33 Objektbereich - Extrem 33 Professionnel - Intensive
Luxury rating Komfortklasse Classement de confort	EN 1307		LC1
Thermal resistance Wärmedurchlaßwiderstand Résistance thermique	ISO 8302	m ² .K/W	0,09
Dimensional stability Dimensionsstabilität Stabilité dimensionnelle	EN 986	%	≤ 0,20
Flammability Brennverhalten Tenue au feu	EN 13501-1		Bfl - s1 Loose laid (2020/210-1)
Prodis - GUT	www.pro-dis.info		127825
DOP			1008#IL0011
Laying direction Verlegerichtung Direction de pose			

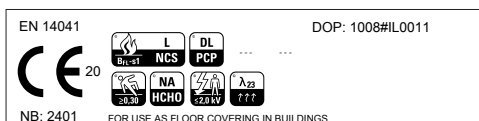

MEDUSA

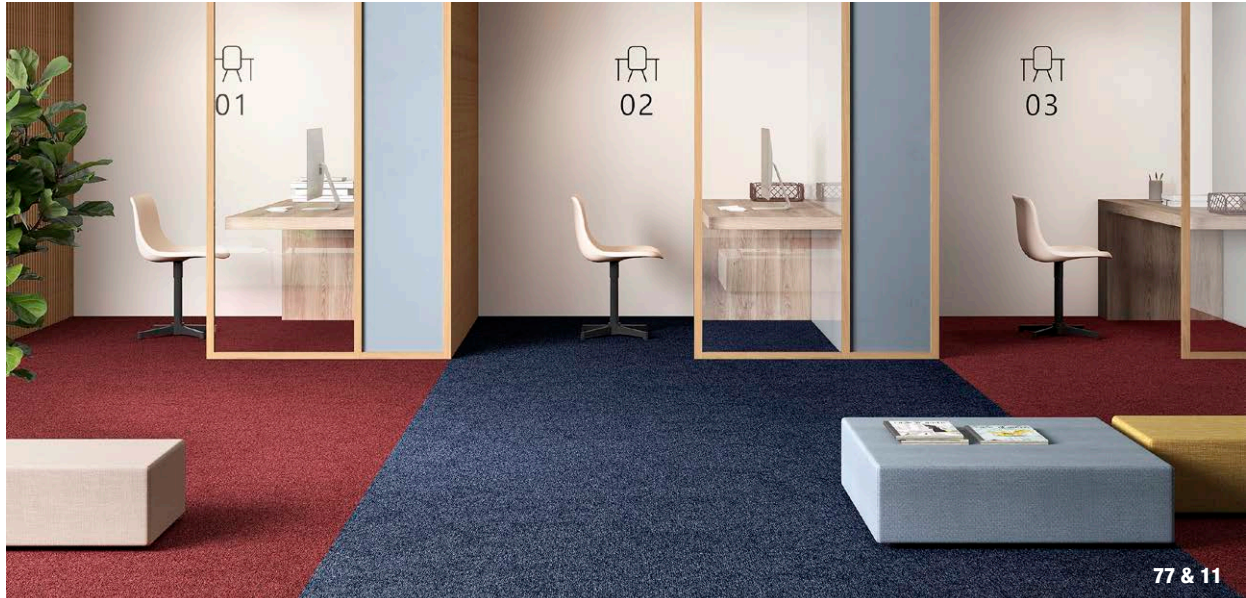

77 & 11



11 50x50cm



21 50x50cm



33 50x50cm



40 50x50cm



43 50x50cm



70 50x50cm



77 50x50cm




84 50x50cm



90 50x50cm



94 50x50cm



98 50x50cm



99 50x50cm