SIEMENS

Data sheet 5SM3346-6

RES.CURRENT OP.CIRCUIT BREAKER TYPE A 63A 3+N-POL IFN 30MA 400V 4MW SUCCESSOR 5SV3 346-6



Figure similar

Model		
product brand name		SENTRON
Product designation		RCCB
Design of the product		Instantaneous

General technical data		
Number of poles		4
Size of installation devices / acc. to DIN 43880		1
Protection against electrical shock		Finger and back-of-hand safe
Short-circuit current rating	kA	10
circuit-breaker / Design		5SM3
Mechanical service life (switching cycles) / typical		10 000
Overvoltage category		III

Supply voltage		
Supply voltage		
• at AC / Rated value	V	400
• for testing equipment / minimum	V	100

Protection class

Changes preserved
© Copyright Siemens AG

Protection class IP		IP20, if the distribution board is installed, with connected conductors
Switching capacity		
Switching capacity current		
• acc. to EN 60898 / Rated value	kA	0.8
Dissipation		
Active power loss		
• for rated value of the current / at AC / in hot operating state / per pole	W	4.9
Electricity		
Tripping residual current / Rated value	mA	30
rated current In / IEC, DIN/VDE / at 40 Cel	A	63
Type of fault current		A
Current / at AC / Rated value	A	63
Surge current resistance / Rated value	kA	1
Product details		
Product property		
• halogen-free		Yes
• silicon-free		Yes
Product expansion / can be installed / supplementary devices		Yes
Number		
Number of test cycles / for environmental testing / acc. to IEC 60068-2-30		28
Connections		
Connectable conductor cross-section / stranded		
• minimum	mm²	1.5
• maximum	mm²	25
Connectable conductor cross-section / solid		
• minimum	mm²	1.5
• maximum	mm²	25
Tightening torque / with screw-type terminals		
• minimum	N·m	2.5
• maximum	N·m	3
Position / of power supply cord		top or bottom
Mechanical Design		
Height	mm	90
Width	mm	72
Depth	mm	77
mounting position		any

Changes preserved
© Copyright Siemens AG

Installation depth	mm	70
Number of width units		4
Mounting type		DIN rail (REG)
Net weight	g	531

Environmental conditions

Ambient temperature		
• minimum	°C	-25
• maximum	°C	45
• during storage / minimum permissible	°C	-40
• during storage / maximum permissible	°C	75

Certificates

Equipment marking		
• acc. to DIN EN 61346-2		F
• acc. to DIN EN 81346-2		F

General Product Approval



CEBEC


CCC


IMQ



VDE



sonstig

Declaration of Conformity	Test Certificates	other
 EG-Konf.	sonstig	Umweltbestätigung

Further information

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)
https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5SM33466


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
http://support.automation.siemens.com/WW/view/en/5SM33466/all


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SM33466

CAx-Online-Generator
http://www.siemens.com/cax

Tender specifications
http://ausschreibungstexte.siemens.com/tiplv

Changes preserved
© Copyright Siemens AG

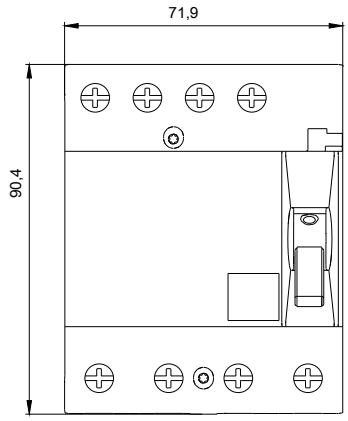

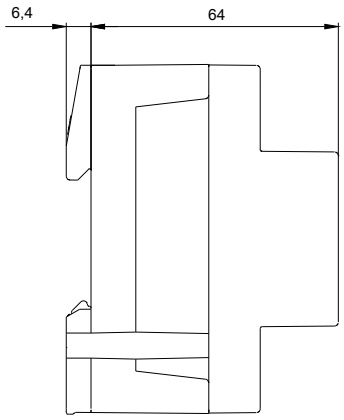

last modified: 24.07.2015

Changes preserved
© Copyright Siemens AG