




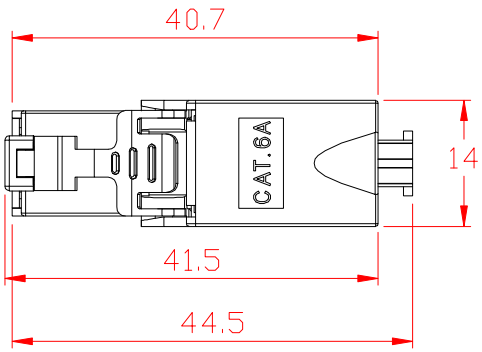





ELECTRICAL:

1. CONTACT RESISTANCE:20M OHMS MAX
2. INSULATION RESISTANCE:250M OHMS MIN @500 DC
3. WITHSTAND VOLTAGE:DC1000V AC700V RMS 60HZ, IMIN
4. CAT6A PERMANENT LINK:CONFORM TO ANST/TIA/EIA 568B.2-10

ENVIRONMENTAL:

5. STORAGE:-40° / +70°
6. OPERATION:-10° / 60°

MECHANICAL:

7. PLASTIC MATERIAL:zinc alloy
8. IDC MATERIAL:PC
9. TERMINAL:PHOSPHOR BRONZE,TIN GOLD 3U" / 6U" /15U" /30U" /50U"
10. RJ45 CONTACT LIFE:750 TIMES MIN
11. IDC LIFE:750 TIMES MIN

TYPE:

12. USNHIELDED CAT6A TOOLLESS PLUG

SYM	Number	Bill No. of Alteration	Signature	Date

Drawn		
Checked		
Approved		

Tolerance

0.00-20.00	±0.10
20.00-50.00	±0.15
50.00-100.00	±0.20
100.00-	±0.25
Angle	±30'

U-kbling

Material				Item No.	100010766657
Angles Projection	Size	Scale	Unit		
	A4	X:1	mm	Part Name	FTP Cat.6a Tolless-plug RJ45
Sheet	1 OF 1	Version: A/0		ERP Part No.	