
Oceanline ToughCat 5e PUR

S/FTP Installation Cable for tougher environments

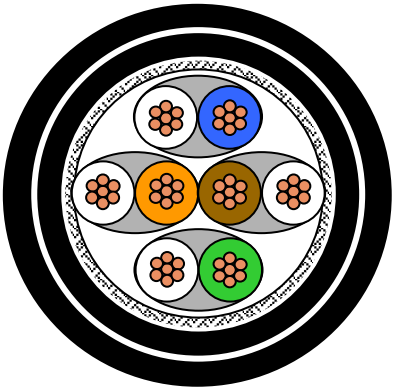

Application

Generic Data transmission. This **Cat.5e S/FTP** cable is meant for use as installation/horizontal cable in tougher electrical and mechanical environment, including ships and offshore units.

Standards

EN 50173-1; EN 50288-2-1
ISO/IEC 11801; IEC 61156-5
Power over Ethernet(PoE/PoE+)

Construction

Conductor	Stranded copper wire Ø 0.22 mm², AWG24
Insulation	PE, Ø 1.4 mm
Twisting	2 cores to the pair
Cable lay up	4 pairs
Pair screen	Al-laminated plastic foil around each pair
Overall screen	Copper braid, tinned Ø 6,2 mm
Water blocking Tape	Swelling tape
Inner sheath	PUR Ø 8,3 mm
Water blocking Tape	Swelling tape
Outer sheath	PUR, Black Ø 11,3 mm

Mechanical Properties

Bending radius	Installation	8 x D
	Installed	4 x D
Temperature range	During operation	-40°C to + 85°C
	During installation	-15°C to + 50°C
Maximum tensile load, installation	During installation	100 N
	Installed	No load

Oceanline ToughCat 5e PUR

Electrical Properties

at 20°C

DC loop resistance		≤ 158 Ω/km
Resistance unbalance		≤ 2%
Insulation resistance	(500 V)	≥ 5000 MΩxkm
Capacitance	at 800 Hz	Nom. 43 nF/km
Capacitance unbalance	(pair to ground)	≤ 300 pF/km
Mean Characteristic impedance	@ 100 MHz)	100 ± 5 Ω
Nominal velocity of propagation		0,75c
Propagation delay		≤ 450 ns/100 m
Delay skew		≤ 15 ns/100 m
Transfer impedance	at 1 MHz	≤ 10 mΩ /m
	at 10 MHz	≤ 8 mΩ /m
	at 30 MHz	≤ 10 mΩ /m
Coupling attenuation		≥ 85 dB
Segregation classification	Acc. to EN 50174-2	"D"

Nominal Transmission characteristics

at 20°C

F (MHz)	Attenuation (dB/100m)	NEXT (dB)	ACR (dB/100m)	Return loss (dB)	PS-NEXT (dB)	PS-ACR (dB/100m)	ELFEXT (dB/100m)	PS-ELFEXT (dB/100m)
1	2,1	90	88		87	85	85	82
4	4,0	90	86	27	87	83	85	82
10	6,3	90	84	30	87	81	79	76
16	8,0	90	82	30	87	79	75	72
20	9,0	90	81	30	87	78	73	70
31.25	11,4	90	79	30	87	76	69	66
62.50	16,5	86	70	30	83	67	63	60
100	21,3	83	62	30	80	59	59	56
155.00	24,2	81	57	26	78	54	57	54
200.00	31,5	78	47	25	75	44	53	50
250.00	35,8	77	41	25	74	38	51	48
300.00	47,1	73	26	23	70	23	47	44
600.00	60,1	71	11	20	68	8	44	41

Technical data

Part no.	Description	Colour	Outer diameter mm	Weight kg/km
90150955	ToughCat PUR C5e S/FTP P 4Px0.22mm²	Black	11.3	100

*)-On request

Oceanline ToughCat 5e PUR

© PRYSMIAN GROUP 2009, All Rights Reserved
All sizes and values without tolerances are reference values. Specifications are for product as supplied by Prysmian Group: any modification or alteration afterwards of product may give different result.
The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian Group. The information is believed to be correct at the time of issue. Prysmian Group reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Prysmian Group.