

IP65

LUMINÁRIA LED SOLAR

ALUMBRADO LED SOLAR - SOLAR LED LUMINAIRE

PT) Descrição do produto

Luminária Solar LED com comando, ideal para iluminação pública, as cargas máximas são alcançadas após 5 a 8 horas de exposição solar.
Uma vez montada, não requer nenhum tipo de manutenção, exceto por uma limpeza superficial do painel em caso de sujidade excessiva.
A sua operação é automática graças ao seu sensor óptico crepuscular que é ativado ao anoitecer.

ES) Descripción del producto

Luminaria LED solar con mando, ideal para alumbrado público, las cargas máximas se alcanzan tras 5 a 8 horas de exposición al sol.
Una vez montada, no requiere ningún tipo de mantenimiento, salvo una limpieza superficial del panel en caso de suciedad excesiva.
Su funcionamiento es automático gracias a su sensor óptico crepuscular que se activa al anochecer.

EN) Product description

Solar LED luminaire with remote control, ideal for public lighting, maximum loads are reached after 5 to 8 hours of sun exposure.
Once assembled, it does not require any type of maintenance, except for a superficial cleaning of the panel in case of excessive dirt.
Its operation is automatic thanks to its optical twilight sensor that is activated at dusk.







Características Gerais - Características generales - General Features

Temperatura de Trabalho - Temperatura de funcionamiento - Working Temperature
-10 ~ 50°C

Bateria - Batería- Battery
3.7V / 30Ah

Painel Solar - Painel Solar - Solar Panel
6V / 30W

Potência - Potencia - Power
300W

Cor de Luz - Color de la Luz - Light Color
6500K

Lumens
3000lm


Ângulo do Feixe - Ángulo del rayo - Beam Angle
75°x135°

Tempo Total de Carga - Tiempo Total de Carga - Total Charging Time
5-8h


Material
ABS e Alumínio - ABS y Aluminio - ABS and Aluminium

CRI	IP	IK
≥70	65	08

Desenho Técnico - Dibujo Técnico - Technical Drawing



Funcionalidades - Features

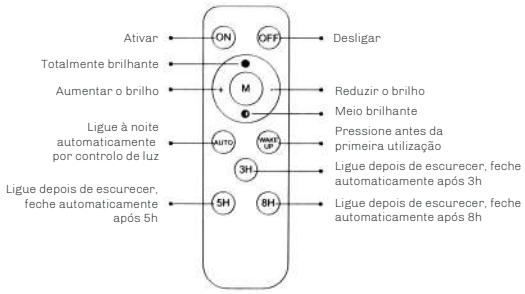

SKU

30165