GREENLEE

ESTANTE METALICO

5660L

UPC # 0783310386599

SKU: 3701690



- El protector de bloqueo empotrado y oculto evita ingresos forzados y problemas por corrosión
- Puertas empotradas con manijas de puerta con ranura para dedos
- Almacenamiento en puerta delantera
- Repisas resistentes y reforzadas
- Amplias áreas inferiores de almacenamiento para objetos más grandes
- Clavijas de bisagras permanentes no extraíbles para impedir robos
- Las nueva estructura antideslizante de apoyo elevada en ángulo de 3-1/2 in cuenta con orificios roscados para colocar ruedas con facilidad
- Diseño impermeable
- Manijas empotradas plegables patentadas y diseñadas ergonómicamente. Recomendamos candados Masterlock N.° 1 y N.° 5 o equivalentes

Especificaciones


Material	Acero calibre 16
Altura total	56 pulg
Ancho total	60 in
Color	Verde
Profundidad total	24 in
Mecanismo de bloqueo	Bolsillo con zapata
Tipo	Gabinete para uso general

*Greenlee® puede introducir mejoras y/o cambios en los datos técnicos de los productos en cualquier momento, a discreción propia y sin obligación o anuncio previo, y además se reserva el derecho a modificar o cancelar modelos.

GREENLEE

ESTANTE METALICO

Utility Cabinets

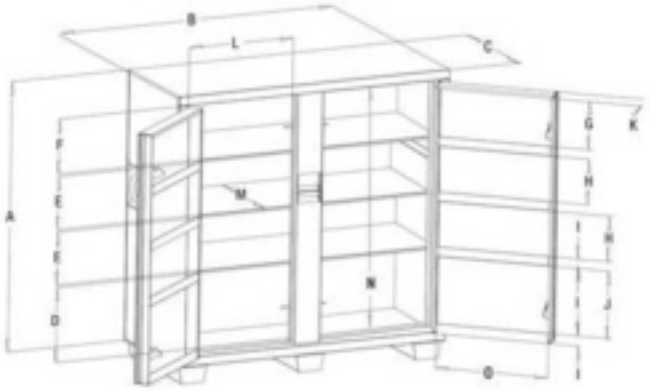


DIMENSIONS

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
5960L	56"	60"	24"	15"	10.5"	11.5"	10"	10"	2"	14"	3"	23.5"	26.5"	50.5"	24"
5960LH	56"	60"	24"	15"	10.5"	11.5"	10"	10"	2"	14"	3"	23.5"	26.5"	50.5"	24"
5760TD	56"	60"	30"	15"	10.5"	11.5"	10"	10"	2"	14"	3"	23.5"	26.5"	50.5"	24"

GREENLEE®

LOCK INSTALLATION

for Storage Boxes 3448, 3460, 3548, 5760, 5660L

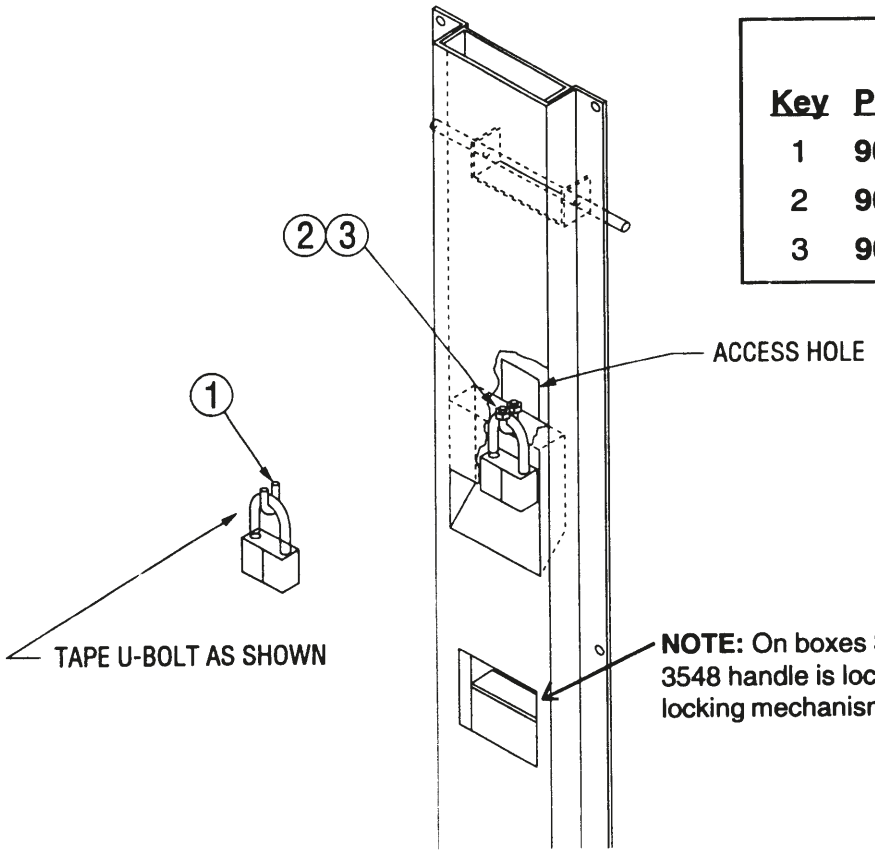

PARTS LIST

Key	Part No.	Description	Qty.
1	**905 4318.1**	U-Bolt	1
2	**905 1674.5**	1/4" Lock Washer	2
3	**905 1669.9**	1/4-20 Hex Nut	2

1. Locate U-bolt, nuts and washers. Supplied loose.
2. Open doors of box for access to back of lock mechanism.
3. Open #1 or #5 master lock with standard shackle (or exact equivalent) with key.
4. Slide U-Bolt ① on to shackle of lock and tape into position as shown, leaving lock open.
5. Feed lock and U-bolt carefully into pocket on front of lock mechanism.
6. Position shackle over rod located inside pocket and position U-bolts through holes located at top of pocket. To check if U-bolt is through holes, an access hole is located on the back of the lock mechanism.
7. When in position, thread lock washers ② and nuts ③ to U-bolt through access hole, tighten securely.

NOTE: Doors cannot be shut when padlock is in locked position.


NOTE: Procedure is reversed to remove or change locks.

© 1992 Greenlee Textron Inc.

GREENLEE®

DOOR LOCK MECHANISM

for Storage Boxes 3448, 3460, 3548, 5760, 5660L

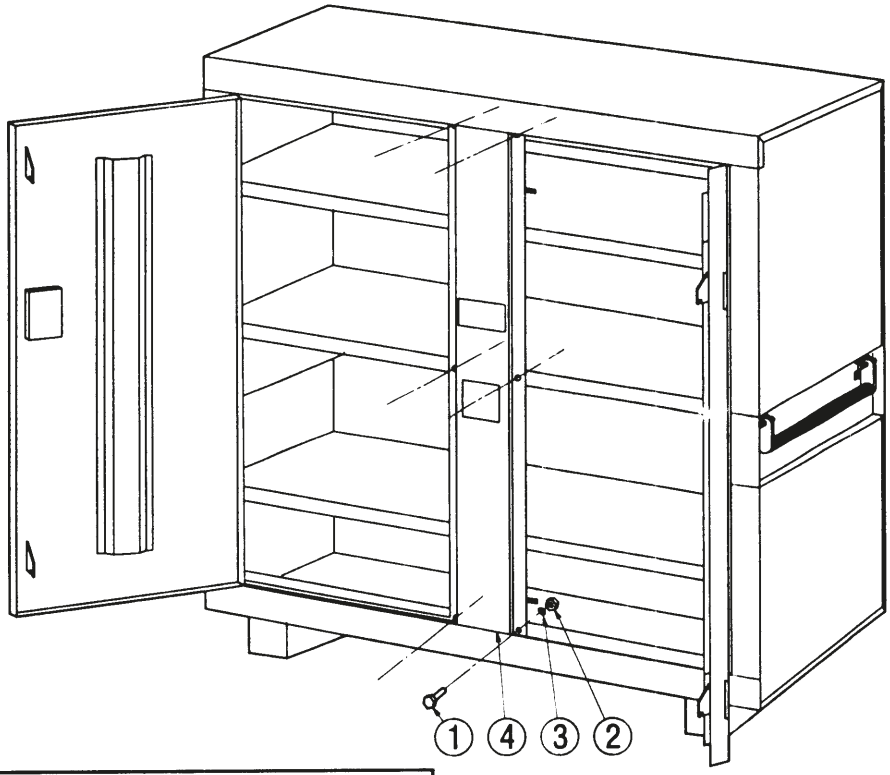

PARTS LIST

Key	Part No.	Description	Qty.
1	**905 3710.6**	1/4-20 X 5/8 Hex Mach. Scr.	6
2	**905 1669.9**	1/4-20 Hex Nut	6
3	**905 1674.5**	1/4" Lock Washer	6
4	**SEE**	Door Lock Mech.	1

Box No.	Lock Mech.
3448	503 8835.5
3460	503 8835.5
3548	503 8835.5
5660L	503 8836.3
5760	503 8836.3

1. Remove old or damaged lock mechanism by removing hex screws and nuts located along each side of mechanism.
2. Position ④ new mechanism and line up holes on sides with existing holes in box.
3. Insert ① 1/4-20 hex screws (supplied) into holes with heads facing out.
4. Thread ③ washers and ② nuts (supplied) onto screws and tighten securely.
5. Install padlock.

GREENLEE TEXTRON

Greenlee Textron Inc. / Subsidiary of Textron Inc.
4455 Boeing Drive, Rockford, IL 61109-2988 USA