

9
kWh/1000h

A+
energy class

90
lumens/watt

GE Bright Stik™

LED 9/STIK/830/220-240V/E27/BX
93064019

Product information

LED Bright Stik™ illuminates spaces with light instantly. Its sleek cylindrical shape fits in place of a traditional incandescent bulb - and some sockets where a traditional bulb or CFL doesn't fit. Replace a 40W, 60W & 100W incandescent with an LED Bright Stik and keep saving for the next 15 years*. That's a long time you can spend not worrying about light bulbs.

Application areas



Retail



Hospitality



Home

Product data

Product Code	93064019
Bulb Shape	T38
Bulb Finish	White
Bulb maximum overall diameter [mm]	38
Nominal Length [mm]	115.5
Net weight per piece [g]	42
RoHS compliant	Yes
Brand	GE Lighting
Cap/Base	E27

Performance data

Nominal/ Rated Beam Angle [°]	240
Rated Lumens [lm]	810
Weighted energy consumption [kWh/1000h]	9.0
Nominal Initial Lumens per Watt [lm/W]	90
Rated efficacy [lm/W]	90
Energy efficiency class (EEC)	A+
Rated life L70/B50 [h]	15000
Nominal correlated colour temperature (CCT) [K]	3000
Nominal lumens [lm]	810
Colour Rendering Index (CRI) [Ra]	80


Electrical data

Nominal lamp power factor...	>0.5
Rated power [W]	9.0
Operating Temperature (MIN) [°C]	-20°C
Operating Temperature (MAX) [°C]	+40°C
Startup time [sec]	<0.5s
Power Factor	>0.5
Number of switching cycles	50000
Dimming Capability	No
Nominal lamp voltage range [V]	220-240V
Nominal power [W]	9

Logistic data

Shipment	Standard
DUN Code	10064894573894
EAN Code	0064894573897
Pack Quantity	15
Inner pack type	Box
Outer pack type	Carton
Product status	Phased-out

Light distribution

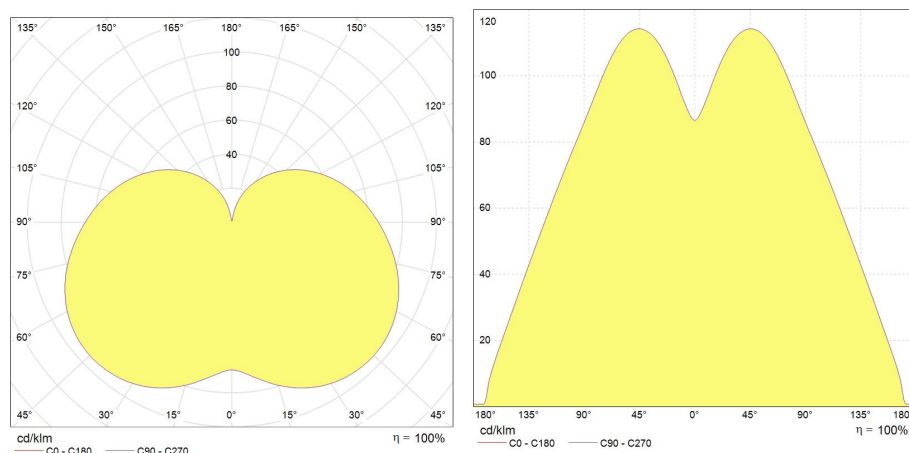

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Photometry \(IES\)](#)

[Product range datasheet \(PDF\)](#)

[User Manual for the Bright Stik™ products \(PDF\)](#)

[Images \(HTTP\)](#)