
GE Lighting



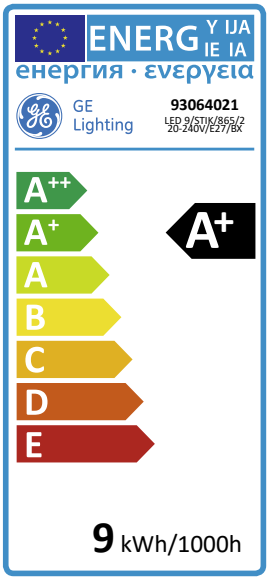

9	A+	94
kWh/1000h	energy class	lumens/watt

GE Bright Stik™

LED 9/STIK/865/220-240V/E27/BX

93064021

Product information

LED Bright Stik™ illuminates spaces with light instantly. Its sleek cylindrical shape fits in place of a traditional incandescent bulb - and some sockets where a traditional bulb or CFL doesn't fit . Replace a 40W, 60W & 100W incandescent with an LED Bright Stik and keep saving for the next 15 years*. That's a long time you can spend not worrying about light bulbs.

Application areas

- Retail
- Hospitality
- Home

CE

WORLDWIDE PARTNER

GE Lighting

GE Bright Stik™

LED 9/STIK/865/220-240V/E27/BX

93064021

Product data

Product Code	93064021
Bulb Shape	T38
Bulb Finish	White
Bulb maximum overall diameter [mm]	38
Nominal Length [mm]	115.5
Net weight per piece [g]	42
RoHS compliant	Yes
Brand	GE BX
Cap/Base	E27

Performance data

Nominal/ Rated Beam Angle [°]	240
Weighted energy consumption [kWh/1000h]	9
Nominal Initial Lumens per Watt [lm/W]	94.4
Rated efficacy [lm/W]	94.4
Energy efficiency class (EEC)	A+
Rated life L70/B50 [h]	15000
Nominal correlated colour temperature (CCT) [K]]	6500
Nominal lumens [lm]	850
Colour Rendering Index (CRI) [Ra]	80

GE Lighting

GE Bright Stik™

LED 9/STIK/865/220-240V/E27/BX

93064021

Electrical data

Nominal lamp power factor...	>0.5
Operating Temperature (MIN) [°C]	-20°C
Operating Temperature (MAX) [°C]	+40°C
Startup time [sec]	<0.5s
Power Factor	>0.5
Number of switching cycles	50000
Dimming Capability	No
Nominal lamp voltage range [V]	220-240V
Nominal power [W]	9

Logistic data

DUN Code	10064894573917
EAN Code	0064894573910
Pack Quantity	15
Inner pack type	Box
Outer pack type	Carton
Product status	Available

Downloads & Links

Go to the catalog site (HTTP)

Product range datasheet (PDF)

Datasheets (HTTP)

Images (HTTP)

Lighting design tools & calculators (HTTP)

Certificate for the Quality Management System of GE Lighting EMEA (PDF)

Certificate for the Environmental Management System of GE Lighting EMEA (PDF)

GE and General Electric are both registered trademarks of the General Electric Company

GE Lighting is constantly developing and improving its products. For this reason, all product descriptions in this brochure are intended as a general guide, and we may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this publication present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, GE Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.