
TUNGSRAM™

Innovation is our heritage
EST. 1896



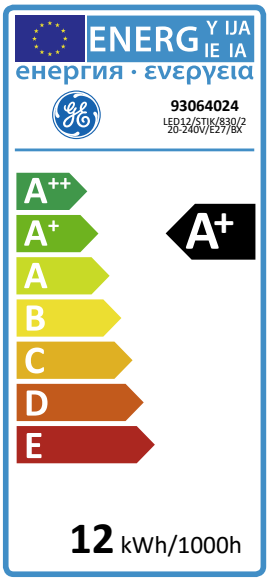


| 12 | A+ | 88 |
|---|---|---|
| kWh/1000h | energy class | lumens/watt |

# GE Bright Stik™

LED12/STIK/830/220-240V/E27/BX

93064024

## Product information

**LED Bright Stik™** illuminates spaces with light instantly. Its sleek cylindrical shape fits in place of a traditional incandescent bulb - and some sockets where a traditional bulb or CFL doesn't fit . Replace a 40W, 60W & 100W incandescent with an LED Bright Stik and keep saving for the next 15 years*. That's a long time you can spend not worrying about light bulbs.

### Application areas

- Retail
- Hospitality
- Home

CE

TUNGSRAM

# GE Bright Stik™

LED12/STIK/830/220-240V/E27/BX

93064024

## Product data

| | |
|---|---|
| Product Code | 93064024 |
| Bulb Shape | T45 |
| Bulb Finish | White |
| Bulb maximum overall diameter [mm] | 45 |
| Nominal Length [mm] | 137.5 |
| Net weight per piece [g] | 69 |
| RoHS compliant | Yes |
| Brand | GE Lighting |
| Cap/Base | E27 |

## Performance data

| | |
|---|---|
| Nominal/ Rated Beam Angle [°] | 240 |
| Rated Lumens [lm] | 1055 |
| Weighted energy consumption [kWh/1000h] | 12.0 |
| Nominal Initial Lumens per Watt [lm/W] | 87.9 |
| Rated efficacy [lm/W] | 87.9 |
| Energy efficiency class (EEC) | A+ |
| Rated life L70/B50 [h] | 15000 |
| Nominal correlated colour temperature (CCT) [K]] | 3000 |
| Nominal lumens [lm] | 1055 |
| Colour Rendering Index (CRI) [Ra] | 80 |

TUNGSRAM

# GE Bright Stik™

LED12/STIK/830/220-240V/E27/BX

93064024

## Electrical data

| | |
|---|---|
| Nominal lamp power factor... | >0.5 |
| Rated power [W] | 12.0 |
| Operating Temperature (MIN) [°C] | -20°C |
| Operating Temperature (MAX) [°C] | +40°C |
| Startup time [sec] | <0.5s |
| Power Factor | >0.5 |
| Number of switching cycles | 50000 |
| Dimming Capability | No |
| Nominal lamp voltage range [V] | 220-240V |
| Nominal power [W] | 12 |

## Logistic data


| | |
|---|---|
| Shipment | Standard |
| DUN Code | 10064894573948 |
| EAN Code | 0064894573941 |
| Pack Quantity | 15 |
| Inner pack type | Box |
| Outer pack type | Carton |
| Product status | Phased-out |

# GE Bright Stik™

LED12/STIK/830/220-240V/E27/BX

93064024

## Light distribution

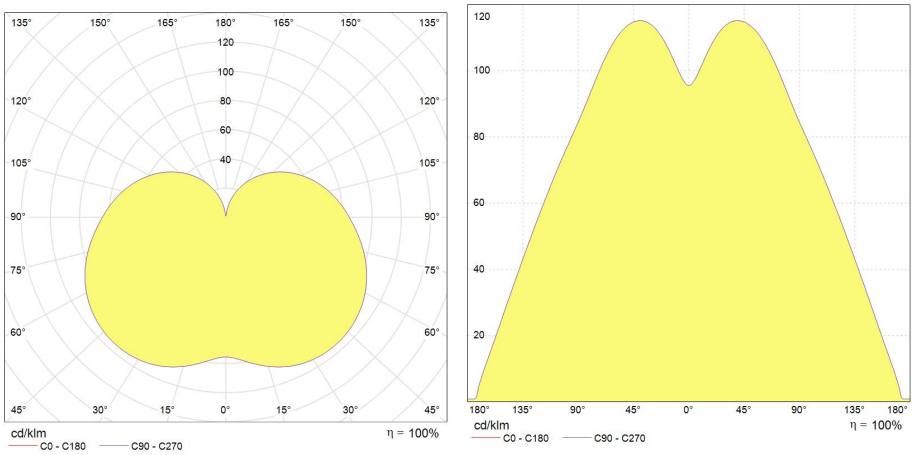


## Downloads & Links

Go to the catalog site (HTTP)

Photometry (IES)

Product range datasheet (PDF)

User Manual for the Bright Stik™ products (PDF)

Images (HTTP)

Tungsram is a registered trademark of Tungsram Operations Kft.

tungsram.com

We in Tungsram Operations Kft. are constantly developing and improving our products. For this reason, all product descriptions in this catalogue are intended as a general guide, and we may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this publication present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, Tungsram cannot accept any liability arising from the reliance on such data to the extent permitted by law.