

CorePro LED PLC 2P

CorePro LED PLC 8.5W 830 2P G24d-3

CorePro LED PLC 2P integrates a LED light source into a traditional fluorescent form factor. This product is the ideal solution for uplamping in general lighting applications: it meets basic lighting requirements, offers significant energy savings, and is environmentally friendly.

Product data

General Information	
Cap-Base	G24d-3
Nominal lifetime	30,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Flux measurement reference	Sphere
CE mark	Yes
EU RoHS compliant	Yes

Light Technical	
Color Code	830 [CCT of 3000K]
Beam Angle (Nom)	120 degree(s)
Luminous Flux	950 lm
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	105.88 lm/W
Color Consistency	<6
Color rendering index (CRI)	83
LLMF At End Of Nominal Lifetime (Nom)	70 %
Photobiological safety according to EN 62471	RG0

Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	8.5 W
Lamp Current (Max)	43 mA
Lamp Current (Min)	33 mA
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (Nom)	220-240 V
LED alternative to fluorescent lamp power	26 W
Inrush current at mains	3.7
Max. lamp no. on MCB B type 10A - Mains	74
Max. lamp no. on MCB B type 10A – EM ballast without Comp. Cap.	150
Max. lamp no. on MCB B type 10A – EM ballast with Comp. Cap.	30
Max. lamp no. on MCB B type 16A - Mains	118
Max. lamp no. on MCB B type 16A – EM ballast without Comp. Cap.	220
Max. lamp no. on MCB B type 16A – EM ballast with Comp. Cap.	49
Ballast Compatibility	EM

CorePro LED PLC 2P

Temperature	
Ambient temperature range	-20 °C to 35 °C
T-Case Maximum (Nom)	75 °C

Controls and Dimming	
Dimmable	No


Mechanical and Housing	
Bulb Material	Plastic
Product Length	200 mm
Bulb Shape	PL-C

Approval and Application	
Energy Efficiency Class	F
Energy Saving Product	Yes
Approval Marks	TUV CE marking RoHS compliance KEMA Keur certificate

Energy Consumption kWh/1000 h	9 kWh
EPREL Registration Number	403554


Product Data	
Order product name	CorePro LED PLC 8.5W 830 2P G24d-3
Full product name	CorePro LED PLC 8.5W 830 2P G24d-3
Full product code	871869654123400
Order code	54123400
Material Nr. (12NC)	929001201202
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696541234
Numerator - Packs per outer box	10
EAN/UPC - Case	8718696541241

Dimensional drawing




Product	D1	D2	A1	A2	A3
CorePro LED PLC 8.5W 830 2P G24d-3	24.3 mm	28.4 mm	128.8 mm	148 mm	170.6 mm

Photometric data




General uniform lighting - CorePro LED PLC 8.5W 830 2P G24d-3



Light Distribution Diagram - CorePro LED PLC 8.5W 830 2P G24d-3


CorePro LED PLC 2P

Photometric data

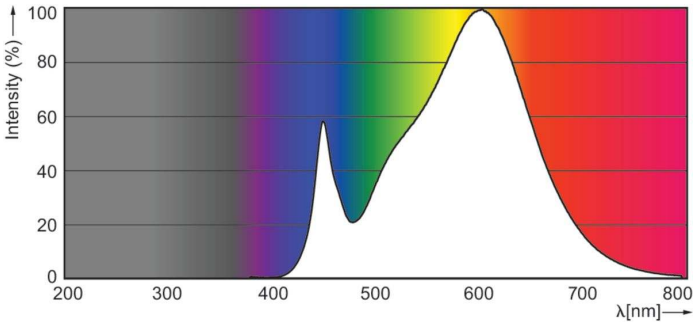


Spectral Power Distribution Colour - CorePro LED PLC 8.5W 830 2P G24d-3


Lifetime

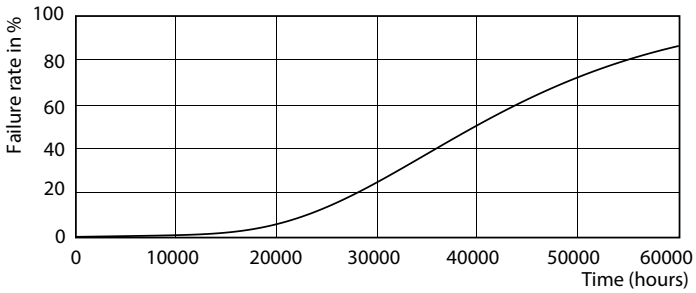


Life Expectancy Diagram - CorePro LED PLC 8.5W 830 2P G24d-3

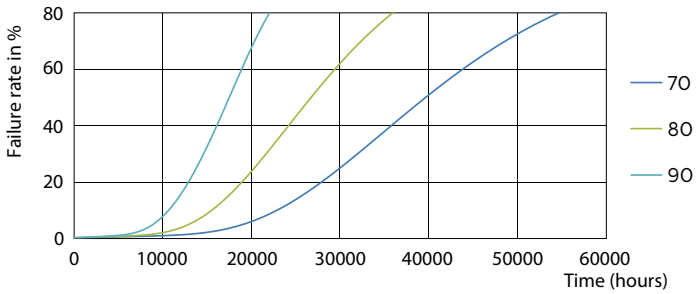

Life Expectancy Diagram - CorePro LED PLC 8.5W 830 2P G24d-3

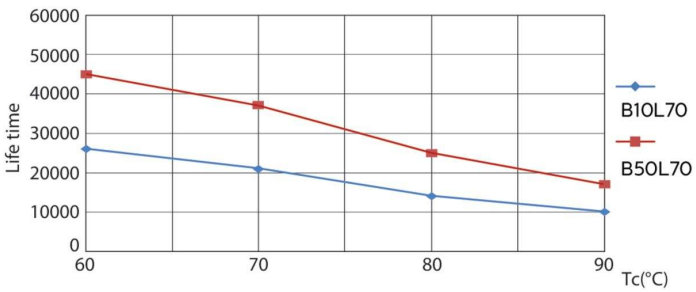


Life Expectancy Diagram - CorePro LED PLC 8.5W 830 2P G24d-3

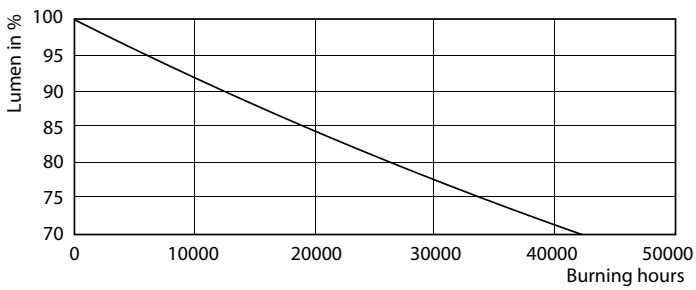

Lumen Maintenance Diagram - CorePro LED PLC 8.5W 830 2P G24d-3

CorePro LED PLC 2P

Lifetime

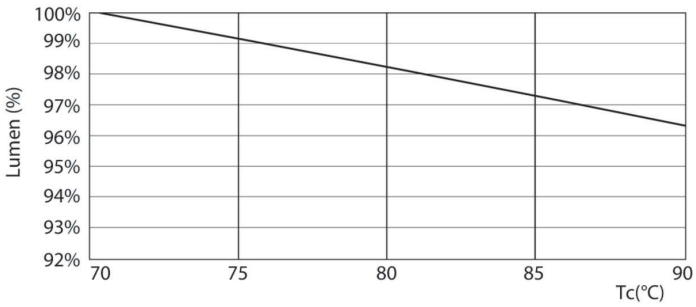

Lumen Maintenance Diagram - CorePro LED PLC 8.5W 830 2P G24d-3

© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.