

Classic filament LED candles and lustres

Classic LEDCandle DT3.5-25W E14 CRI90 B35 CL

Featuring a classic heritage design, filament LED candles and lustres combine the familiar shapes of classic incandescent candles or lustres with the benefits of long-lasting LED technology. They deliver beautiful, decorative warm-white light while saving around 90% on energy costs compared with traditional light candles and lustres.

Product data

General Information	
Cap base	E14 [E14]
Nominal lifetime	15,000 h
Switching Cycle	20,000
Lighting Technology	LED
EU RoHS compliant	Yes

Light Technical	
Colour Code	927-922 [CCT of 2700K-2200K]
Luminous Flux	250 lm
Colour designation	Warm Glow (WG)
Luminous efficacy (rated) (nom.)	71.00 lm/W
Colour consistency	<6
Colour rendering index (CRI)	90
LLMF at end of nominal lifetime (nom.)	70 %

Operating and Electrical	
Line Frequency	50 to 60 Hz
Input frequency	50 to 60 Hz
Power Consumption	3.5 W
Lamp current (nom.)	25 mA
Wattage equivalent	25 W
Starting time (nom.)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.68
Voltage (nom.)	220-240 V

Temperature	
T-Case maximum (nom.)	55 °C

Controls and Dimming	
Dimmable	Yes

Mechanical and Housing	
Lamp Finish	Clear
Bulb shape	B35 [B 35 mm]


Approval and Application	
Energy consumption kWh/1,000 hours	4 kWh

Classic filament LED candles and lustres

Product Data	
Order product name	CLA LEDCandle DT3.5-25W E14 CRI90 B35 CL
Full product name	Classic LEDCandle DT3.5-25W E14 CRI90 B35 CL
Full EOC	871869964622600
Order code	64622600
Material no. (12 NC)	929002017902


SAP numerator – quantity per pack	1
EAN/UPC — Product/Case	8718699646226
Numerator – packs per outer box	10
EAN/UPC - Case	8718699646233

Dimensional drawing




Product	D	C
CLA LEDCandle DT3.5-25W E14 CRI90 B35 CL	35 mm	104 mm


Photometric data



General uniform lighting - CLA LEDCandle DT3.5-25W E14 CRI90 B35 CL




Light Distribution Diagram - CLA LEDCandle DT3.5-25W E14 CRI90 B35 CL




Spectral Power Distribution Colour - CLA LEDCandle DT3.5-25W E14 CRI90 B35 CL

Classic filament LED candles and lustres

Lifetime

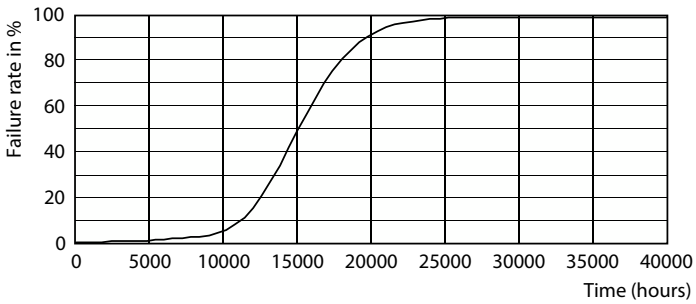

Life Expectancy Diagram - CLA LEDCandle DT3.5-25W E14 CRI90 B35 CL

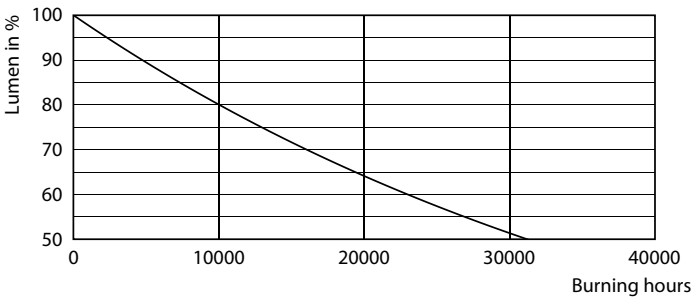

Lumen Maintenance Diagram - CLA LEDCandle DT3.5-25W E14 CRI90 B35 CL

© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.