# TEMPORARY LIFELINE

LIFELINE

Ref. 1095 - 109501

ROOFS, CONSTRUCTION, TOWERS/INDUSTRY

Horizontal temporary lifeline constructed from strong and durable polyester webbing. Certified for use with a maximum of two people. Equipped with steel tensioning ratchet, two polyamide anchor loops (ref.104065), and two locking steel connectors (ref.0981).

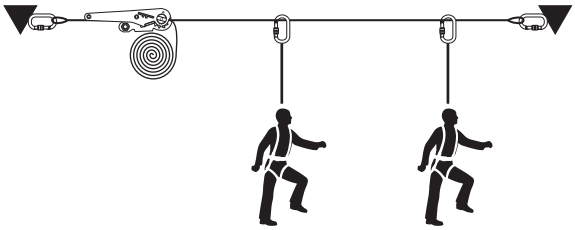
**Art.1095** 18 meters
**Art.109501** 30 meters




**1095** 18 m

**109501** 30 m





| Ref. | Product name | Weight | | CE | STANDARD | | EAC |
|---|---|---|---|---|---|---|---|
| | | g | oz | EN 795/B+C | EN 795/C | TS 16415 | |
| 1095 | TEMPORARY LIFELINE 5-18 m | 3000 | 105.9 | • | • | • | • |






# TEMPORARY LIFELINE

LIFELINE

Ref. 1095


ROOFS, CONSTRUCTION, TOWERS/INDUSTRY

| A REF. | | L min | L max | L max | $L_1$ min | $L_1$ max |
|---|---|---|---|---|---|---|
| **1095** Temporary Lifeline 18 m | EN 795 B+C | 5 m | 18 m | 18 m | 5 m | 18 m |
| | EN 795 C | 12 m | 18 m | 18 m | 5 m | 18 m |
| **109501** Temporary Lifeline 30 m | EN 795 B+C | 5 m | 18 m | 30 m | 5 m | 18 m |
| | EN 795 C | 12 m | 18 m | 30 m | 5 m | 18 m |

| B BENDING (f) MAX FORCE ON THE ANCHOR (Fmax) | | f EN 795/B+C | f EN 795/C | Fmax |
|---|---|---|---|---|
|  | | 65 cm | - | 13 kN |
| | | 70 cm | - | 14 kN |
|  | | 150 cm | 145 cm | 12 kN |
| | | 165 cm | 160 cm | 13 kN |
|  | | 225 cm | 220 cm | 10 kN |
| | | 240 cm | 235 cm | 11 kN |
|  | | 115 cm | 110 cm | 7 kN |
| | | 125 cm | 120 cm | 8 kN |
|  | | 260 cm | 250 cm | 9 kN |
| | | 275 cm | 265 cm | 11 kN |

**Installation**

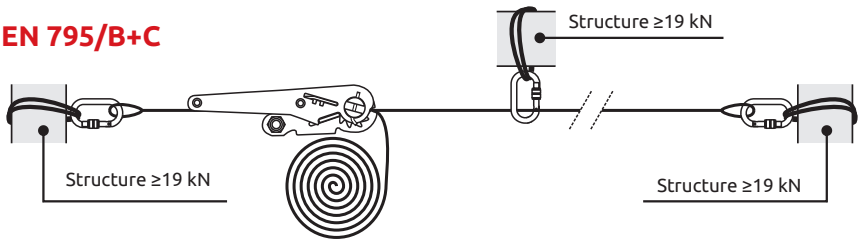**EN 795/B+C**




**EN 795/C**

