VIIIS Nozzles

Husky GENERAL FUELING PRODUCTS

Pressure activated, automatic shut-off nozzle with polymer handguard for truck stop and other high volume full-service, self-service and unattended stations.

- VIIIS nozzle shuts off when:
  - the pump shuts off.
  - the gas tank is full.
  - the lever is opened before the pump is turned on.
  - the leak detector has not completed the test cycle.
- Spout is reinforced with thick aluminum bushing that retains spout spring and keeps spout from rounding-in: the two leading causes of clicking off and splash-back spillage.
- Nozzle is equipped with a unique Flo-Stop® device that shuts off the nozzle if it falls from the fill tank or raises above the horizontal.




New Heavy Duty Diesel Nozzles with NPT

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
177610	with Three Notch Hold Open Clip, Waffle Splash Guard and Spout Bushing	4.6 (2.0)
17761001	with Three Notch Hold Open Clip, Waffle Splash Guard, Long Spout and Spout Bushing	4.6 (2.0)
177690	with Three Notch Hold Open Clip, POPD® S Full Grip Guard, Waffle Splash Guard and Spout Bushing	4.6 (2.0)
177612	without Hold Open Clip, with Waffle Splash Guard and Spout Bushing	4.6 (2.0)
1776147	with Three Notch Hold Open Clip, POPD® H Full Grip Guard, Waffle Splash Guard and Spout Bushing	4.6 (2.0)
504010	with Three Notch Hold Open Clip and Waffle Splash Guard without Spout Bushing	4.6 (2.0)
504012	without Hold Open Clip and Spout Bushing, with Waffle Splash Guard	4.6 (2.0)
5040132	with Three Notch Hold Open Clip, without Waffle Splash Guard or Spout Bushing	4.6 (2.0)
11043132	with Three Notch Hold Open Clip, and Short Spout Spring, without Spout Bushing or Waffle Splash Guard	4.6 (2.0)
1776240	with Single Notch Hold Open Clip, Waffle Splash Guard and Spout Bushing	4.6 (2.0)

Construction

Body	Aluminum
Seals	Fluorocarbon
Packing	Double o-ring seal protected by fiber reinforced Teflon®
Lever	One piece contoured steel
Inlet	1" / 25.4 mm NPT

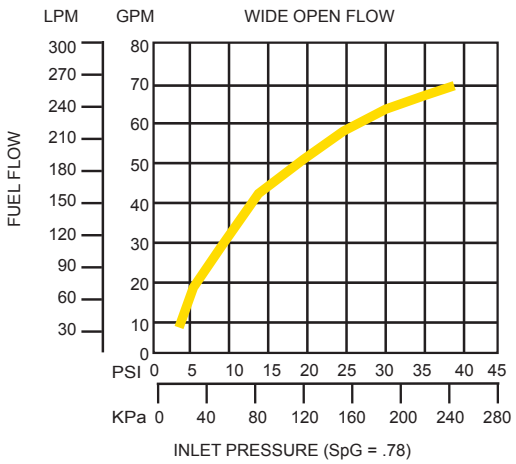

ISO 9001:2015 CERTIFIED COMPANY

c UL us

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov